





RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


3.8" Width Linear

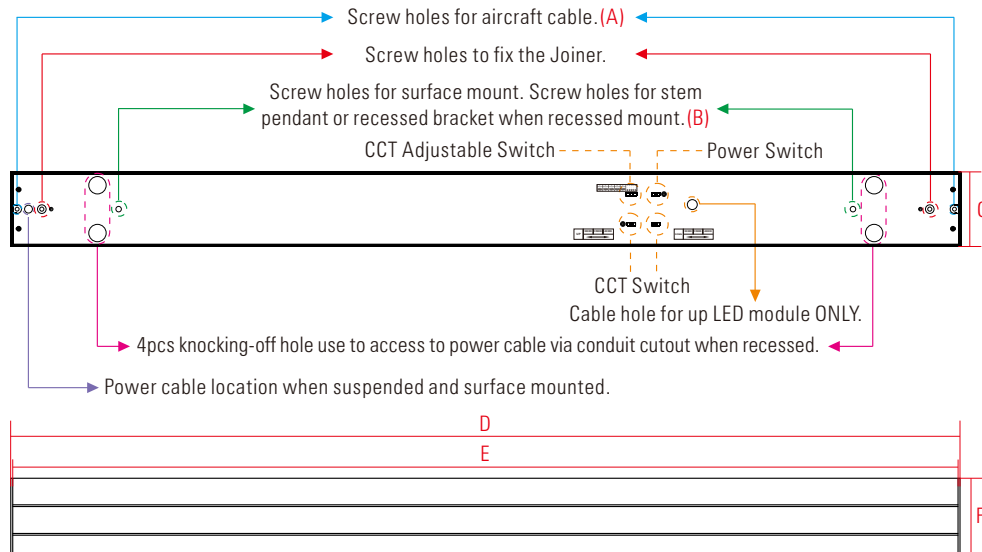

2.3" Width Linear - 1

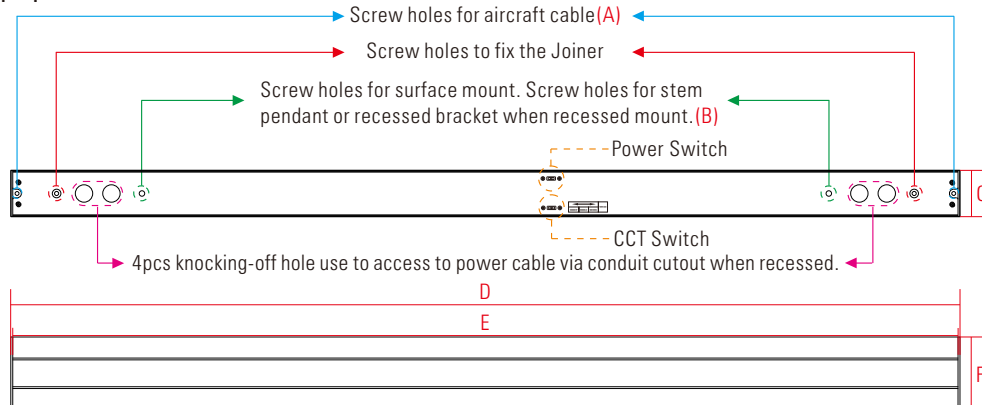

2.3" Width Linear - 2

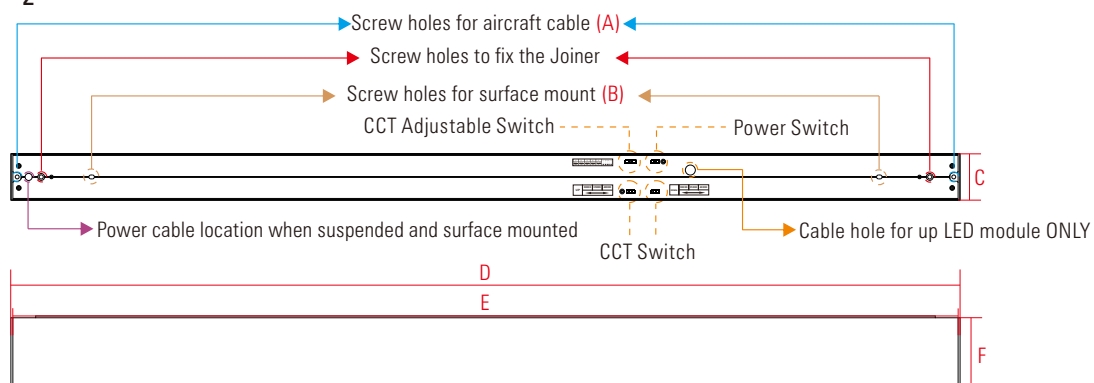

Nominal Length	A	B			C		D	E	F	
	Feet	2.3" Width Linear-1	2.3" Width Linear-2	3.8" Width Linear	2.3" Width Linear-1	3.8" Width Linear	Feet	Feet	2.3" Width Linear-1	3.8" Width Linear
2FT	1.92'	0.99'	1.30'	1.07'	0.19'	0.31'	1.98'	1.96'	0.29'	0.31'
3FT	2.94'	1.88'	2.30'	2.07'	0.19'	0.31'	2.98'	2.96'	0.29'	0.31'
4FT	3.94'	2.88'	3.30'	3.07'	0.19'	0.31'	3.98'	3.96'	0.29'	0.31'
8FT	7.90'	6.84'	7.26'	7.03'	0.19'	0.31'	7.94'	7.92'	0.29'	0.31'

2.3"/3.8" Width

SURFACE

LED


ARCHITECTURAL LED LUMINAIRE
INDEPENDENT INSTALLATION

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


IMPORTANT

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. The maximum connection of each input line is 40FT in 120AC, 80FT in 230AC, 100FT in 277AC.


ACCESSORY




Butterfly Drywall Anchor




Wire Nut




Screw



Square Plate
Noted: Square plate Compatible for 4" octagon, 4" round, 4" square and 2x4" rectangle junction boxes.





Anchor



Screw


WIRING

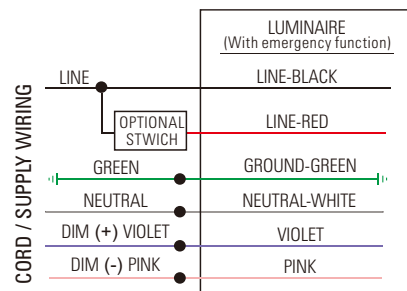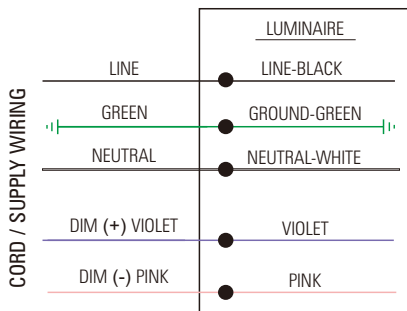


Please isolate two dimming wires by P2 terminal individually if no need dimming;
MUST connect wires with corresponding colors as shown.

PRE-INSTALLATION

ASSEMBLE LUMINAIRE




1. Take off LED modular, thread the power cord into the cord holder as shown.



2. Wiring
Must connect connectors with corresponding colors as shown.


(The green ground wire is connected with a wire nut. Insert the yellow male and female to connect the black and white AC wire. Insert the orange male female to connect the purple, pink dimming wires.)



3. Fix the power cord with holder nut, remount LED modular and end cap.

INDEPENDENT INSTALLATION


1 Prepare mounting point in the ceiling

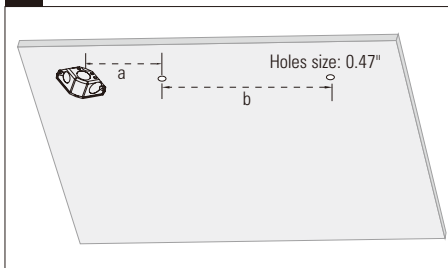

a: The center distance between the ceiling hole and the junction box.

b: The distance between two ceiling hole.

2 Mount plate and wiring

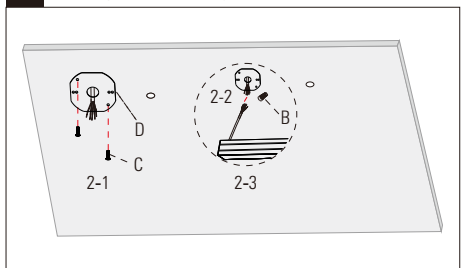


2-1: Cover the junction box with square plate "D" and fix it with screw "C", then plastering.

2-2: Then using the wire nut "B" to connect AC wires and dimming wires.

2-3: Hide all wires into the junction box.

	3.8" Width Linear		2.3" Width Linear - Version 2		2.3" Width Linear - Version 1	
Nominal Length	"a"	"b"	"a"	"b"	"a"	"b"
	Feet	Feet	Feet	Feet	Feet	Feet
2FT	0.38'	1.07'	0.26'	1.30'	0.42'	0.99'
3FT	0.38'	2.07'	0.26'	2.30'	0.48'	1.88'
4FT	0.38'	3.07'	0.26'	3.30'	0.48'	2.88'
8FT	0.38'	7.03'	0.26'	7.26'	0.48'	6.84'

3 Screw the housing in the ceiling

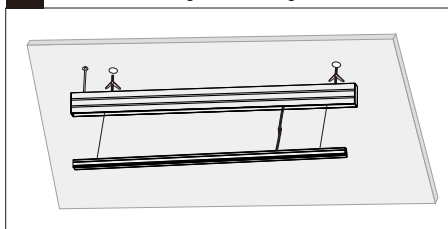

3-1: Fix the housing in the ceiling with butterfly drywall anchor "A".

Remark: Fix the housing with screws "F" if wooden frame ceiling. Fix the housing with anchor "E" and screws "F" if cement drywall.


3-2: Press the LED modular into housing.

4 Complete



⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

JOINDER OPTIONS



Line Joiner

'L' Joiner

Noted: It needs 2 inputs if using joiner "T", "+", and "Y".

ACCESSORY




Silicone Seal

Noted: Silicone Seal is used to seal seams that may appear at both ends of luminaires when multiple connections.

BEFORE CONNECTING


DISASSEMBLE LUMINAIRES

LINE CONNECTION

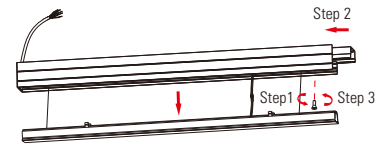

Start of run (SoR):

Remove the end cap without power code, and take the LED module out. Then install line joiner.

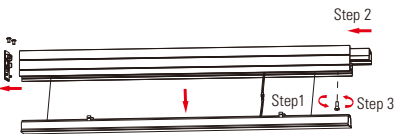

Middle of run (MoR):

Remove both end cap, and take the LED module out. Then install line joiner.



End of run (EoR):


Remove the end cap and take the LED module out.

L SHAPE CONNECTION



Start of run (SoR):

Remove the end cap without power code, and take the LED module out.

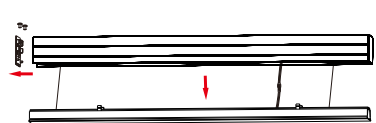


End of run (EoR):

Remove the end cap and take the LED module out.


LINE CONNECTION

1 Prepare mounting point in the ceiling

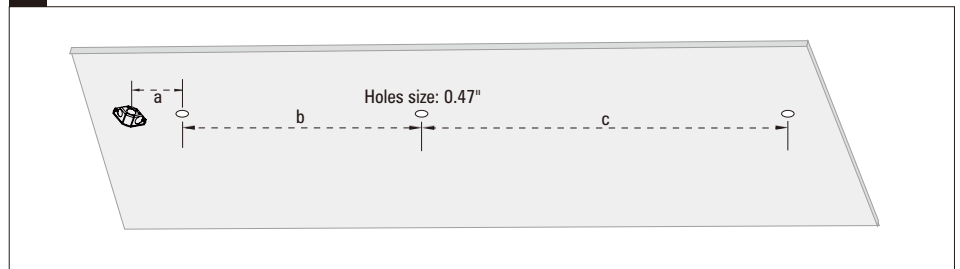

	3.8" Width Linear			2.3" Width Linear - Version 2			2.3" Width Linear - Version 1		
	"a"	"b"	"c"	"a"	"b"	"c"	"a"	"b"	"c"
Nominal Length	Feet	Feet	Feet	Feet	Feet	Feet	Feet	Feet	Feet
2FT	0.38'	1.07'	1.96'	0.26'	1.30'	1.96'	0.42'	0.99'	1.96'
3FT	0.38'	2.07'	2.96'	0.26'	2.30'	2.96'	0.48'	1.88'	2.96'
4FT	0.38'	3.07'	3.96'	0.26'	3.30'	3.96'	0.48'	2.88'	3.96'
8FT	0.38'	7.03'	7.92'	0.26'	7.26'	7.92'	0.48'	6.84'	7.92'

2 Mount plate and wiring

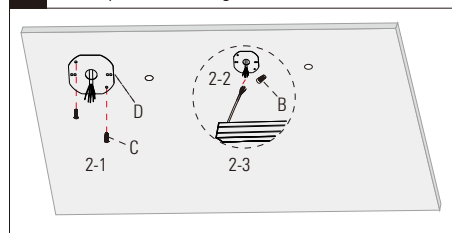


2-1: Cover the junction box with square plate "D" and fix it with screw "C", then plastering.

2-2: Then using the wire nut "B" to connect AC wires and dimming wires.

2-3: Hide all wires into the junction box.

3 Install the housing and joiner - SoR

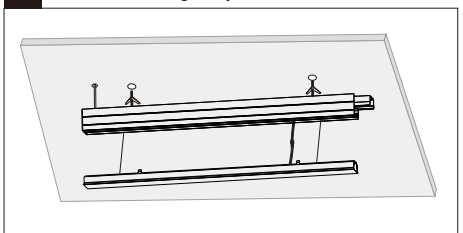


3-1: Fix the housing in the ceiling with butterfly drywall anchor "A". Remark: Fix the housing with screws "F" if wooden frame ceiling.

Fix the housing with Anchor "E" and Screws "F" if cement drywall.

3-2: Insert the joiner "—" into the SoR housing and fix it by screws.

4 Repeat install and join steps-MoR to EoR

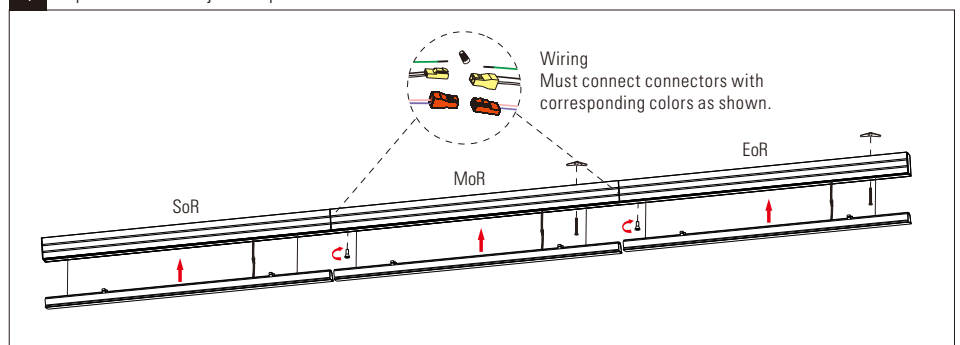

4-1: Fix the housing in the ceiling in turn.

4-2: Connect the quick connectors properly.

4-3: Insert all the LED modules into the housing from SoR to EoR in turn.

2.3"/3.8" Width


SURFACE

LED


ARCHITECTURAL LED LUMINAIRE
MULTIPLE LUMINAIRES CONNECTION

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

5 Complete

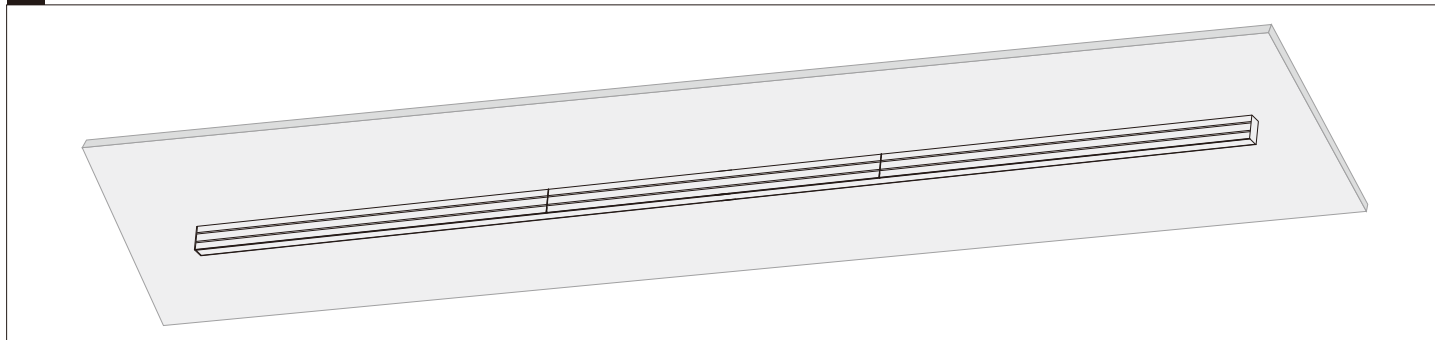

Optional 40' Diffuser Lens Roll

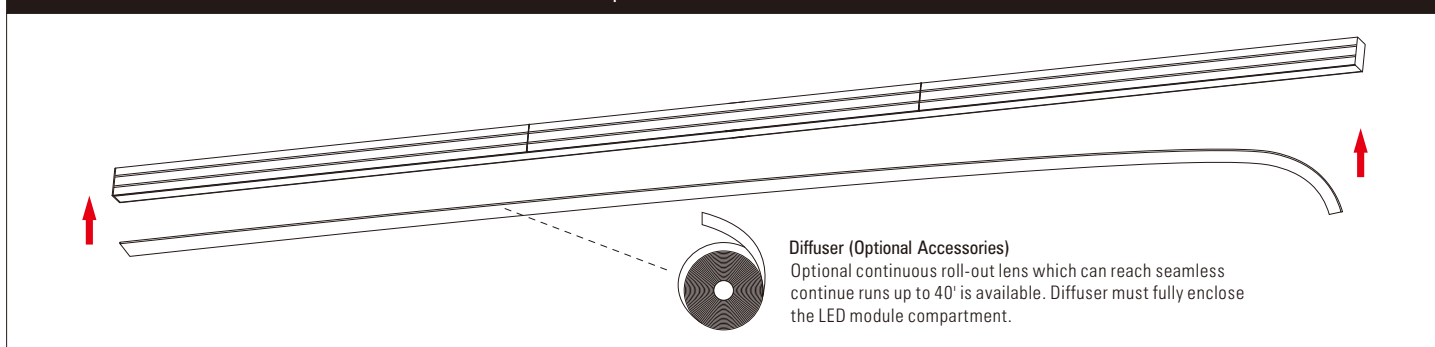


L SHAPE CONNECTION


⚠ For "T", "⊥", "Y", "V" shape or other geometric shapes, all subject to the "L" shape installation.

⚠ It needs 2 inputs if using joiner "T", "⊥" and "Y".

1 Make hole in the ceiling

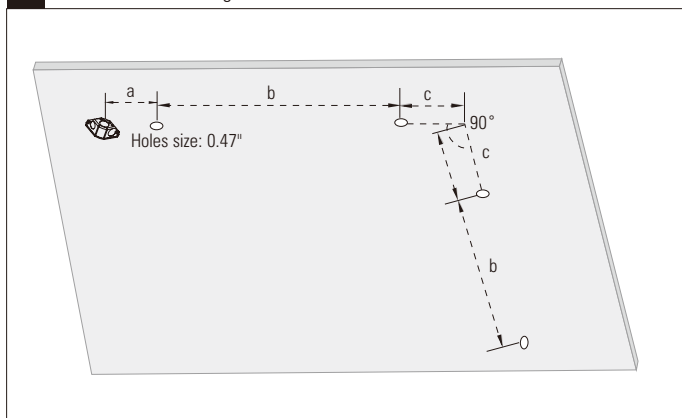


2 Mount plate and wiring

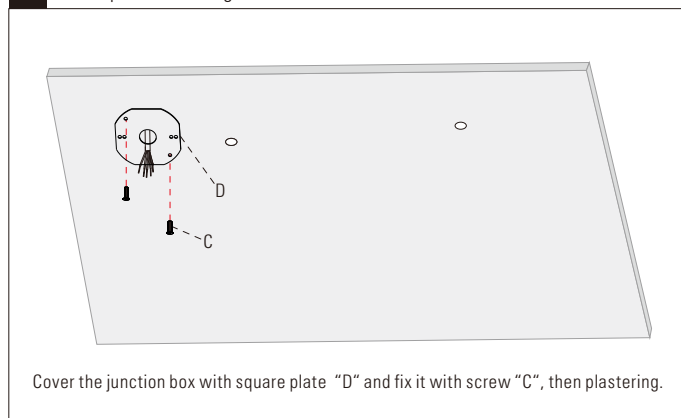


	3.8" Width Linear - Version 1			2.3" Width Linear - Version 1			2.3" Width Linear - Version 2			
Nominal Length	"a"	"b"	"c" Illuminated "L" Joiner	"a"	"b"	"c" Illuminated "L" Joiner	"a"	"b"	"c" Illuminated "L" Joiner	"c" Non-luminous "L" Joiner
	Feet	Feet	Feet	Feet	Feet	Feet	Feet	Feet	Feet	Feet
2FT	0.38'	1.07'	0.76'	0.42'	0.99'	0.75'	0.26'	1.30'	0.59'	0.43'
3FT	0.38'	2.07'	0.76'	0.48'	1.88'	0.80'	0.26'	2.30'	0.59'	0.43'
4FT	0.38'	3.07'	0.76'	0.48'	2.88'	0.80'	0.26'	3.30'	0.59'	0.43'
8FT	0.38'	7.03'	0.76'	0.48'	6.84'	0.80'	0.26'	7.26'	0.59'	0.43'

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


3

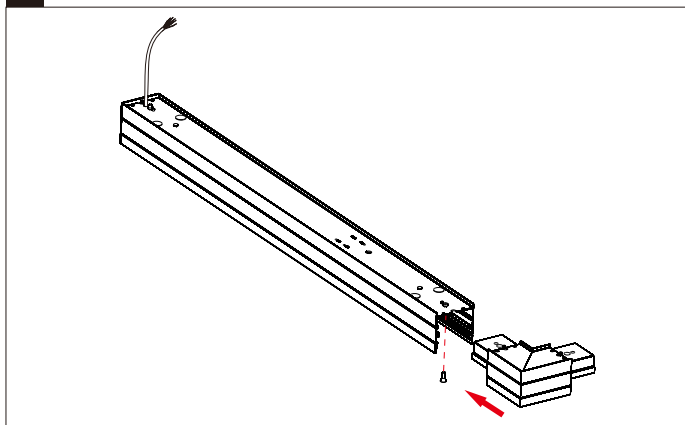


4

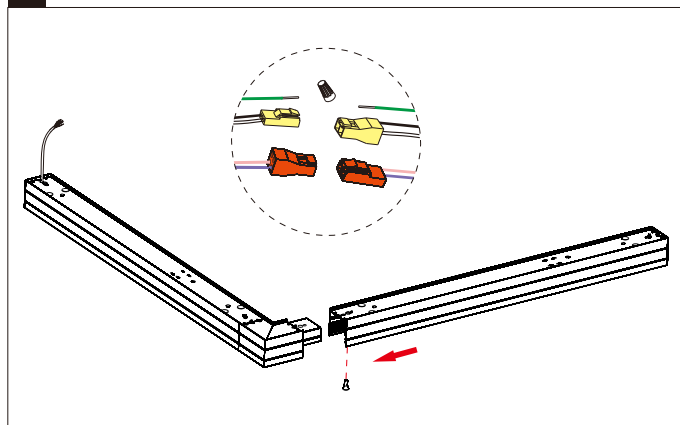

5

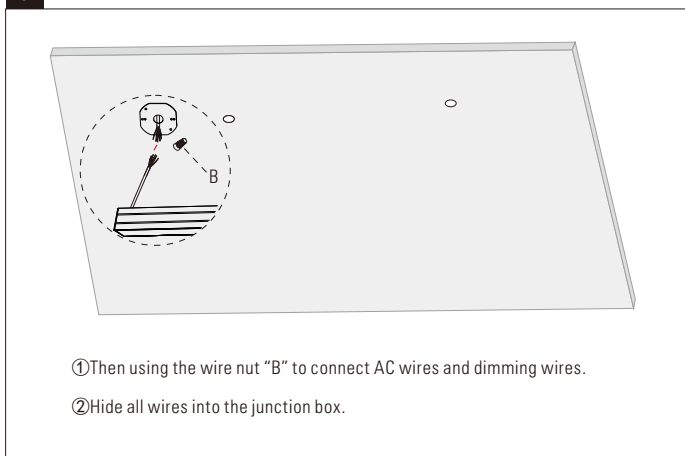

6

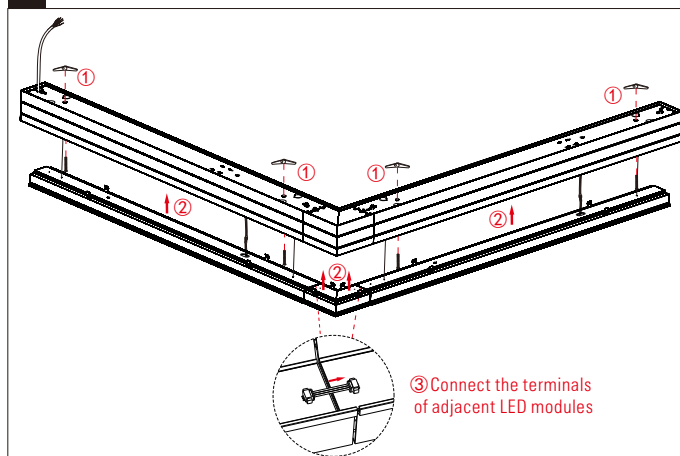

7

Complete

