


1.8" Width | WALL MOUNT | LED

Architectural LED Luminaire Installation Instructions

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

The product styles you received


First style: finished product with power cord

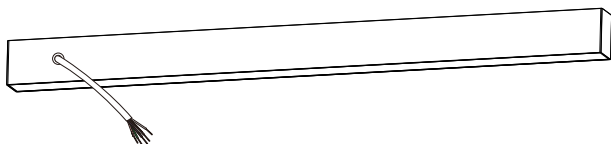

Second style: finished product with separate power cord





① Finished product without power cord



Power cord kits

Third style: semi-finished product

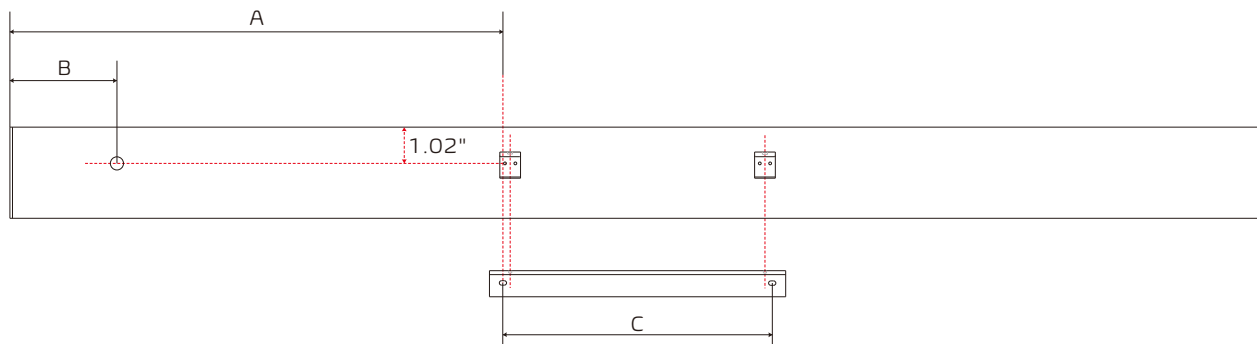

			
Nominal Length	"A"	"B"	"C"
	Inch	Inch	Inch
2 ft.	6.73"	4.43"	10.24"
4 ft.	18.74"	4.43"	10.24"
8 ft.	42.50"	4.43"	10.24"

1.8" Width WALL MOUNT LED


Architectural LED Luminaire Independent Installation

! RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


IMPORTANT

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. The maximum connection of each input line is 40FT(1200CM) in 120AC, 80FT(2400CM) in 230AC, 100FT(3000CM) in 277AC.


ACCESSORY




Wire Nut




Square plate
(Optional accessory)
Noted: Square plate
Compatible for 4" octagon, 4" round,
4" square and 2x4" rectangle junction
boxes.




Anchor




Screw




Screw



Screw



Wall Mounting Bracket



Butterfly
Drywall
Anchor

WIRING

CORD / SUPPLY WIRING	LUMINAIRE	
	LINE	LINE- BLACK
	GREEN	GROUND-GREEN
	NEUTRAL	NEUTRAL- WHITE
	DIM (+) VIOLET	VIOLET
	DIM (-) PINK	PINK

! Please isolate two dimming wires by P2 terminal individually if no need dimming; **MUST connect wires with corresponding colors as shown.**


INDEPENDENT INSTALLATION

1 Assemble Power Cord


If the product and power cord are separated, please refer to the following step to install the power cord firstly.

Wiring
Must connect connectors with corresponding colors as shown.

Take off the end cap and LED modular, thread the power cord out of the housing as shown.
Wiring and then remount LED modular and end cap.

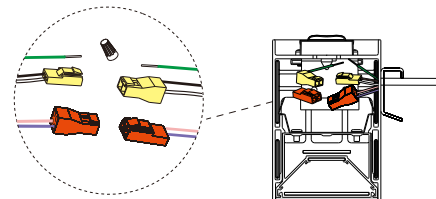


2 Install mounting point on wall

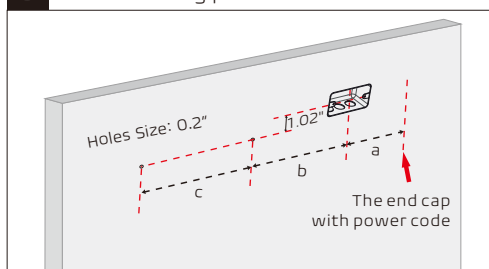

Nominal Length	1.8" Width		
	"a" Feet	"b" Feet	"c" Feet
2 ft.	0.37'	0.19'	0.85'
4 ft.	0.37'	1.19'	0.85'
8 ft.	0.37'	3.17'	0.85'


3 Install plate and bracket

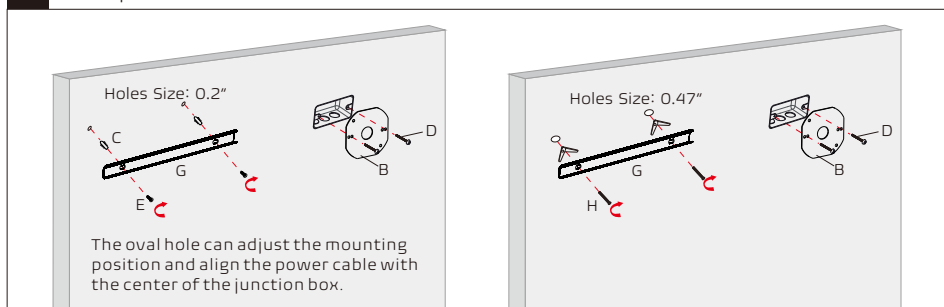

3-1: Insert Anchor "C" into hole and fix the wall mounting bracket "G" with screw "E".
Remark: You can also fix the wall mounting bracket "G" with butterfly drywall anchor "H".


3-2: Mount the square cover plate "B" onto J-box with screw "D", then plastering.

4 Wiring

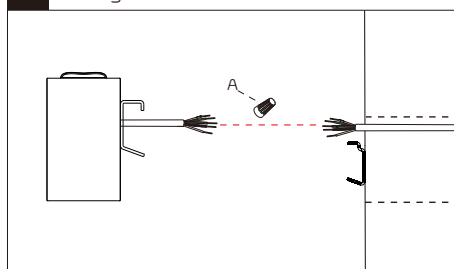


4-1: Using the wire nut "A" to connect AC wires and dimming wires.
4-2: Hide all wires into the junction box.

5 Mounting

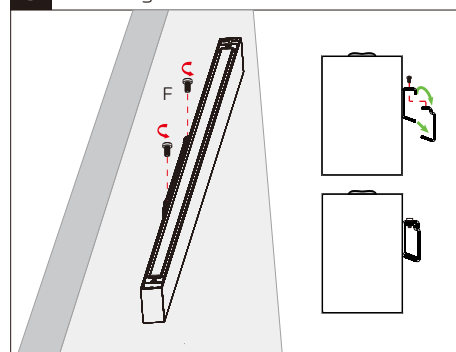

6 Complete

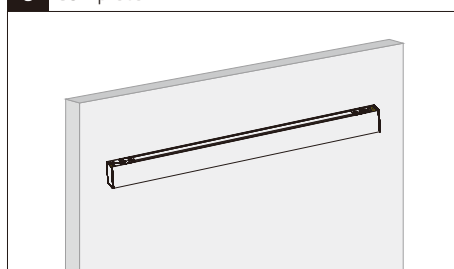

1.8" Width WALL MOUNT LED

Architectural LED Luminaire Multiple Luminaires Connection

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

ACCESSORY



"—" Joiner




Silicone Seal

Noted: Silicone Seal is used to seal seams that may appear at both ends of luminaires when multiple connections.


BEFORE CONNECTING

Disassemble luminaires

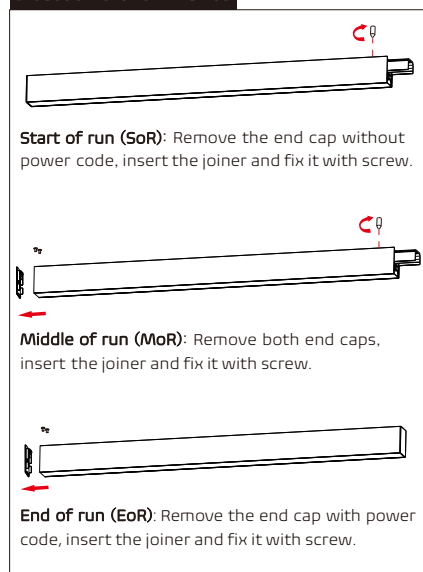


MULTIPLE LUMINAIRES CONNECTION


1 Install mounting point on wall

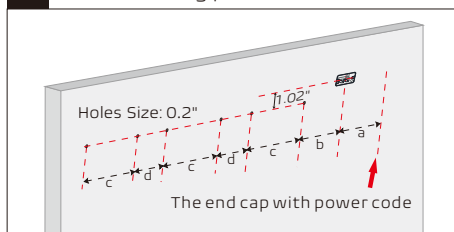


2 Install plate and bracket from SoR to EoR

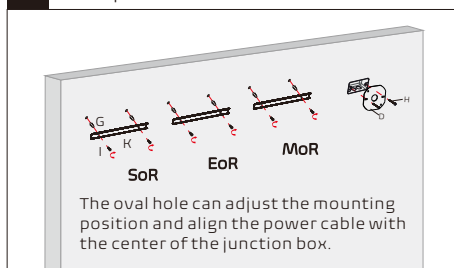


4 Mounting

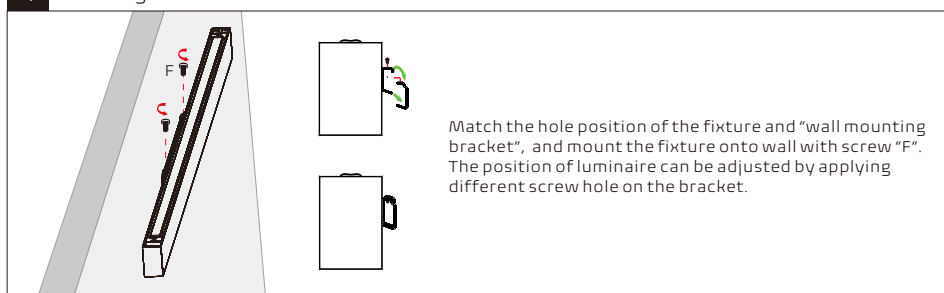

5 Repeat install and join steps - MoR to EoR

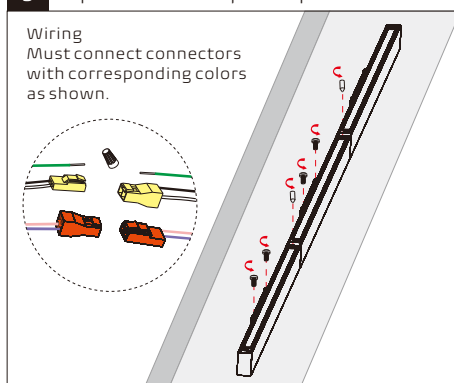

6 Complete

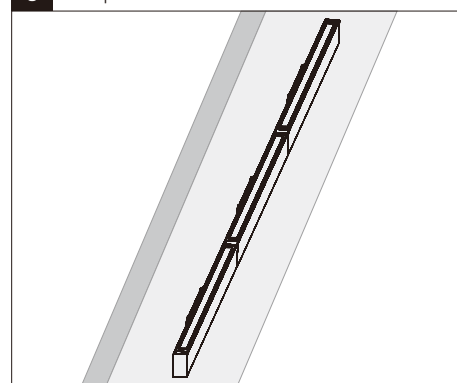

Optional 42' Diffuser Lens Roll

