


! RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


BEFORE CONNECTING

MULTIPLE LUMINAIRES CONNECTION – L SHAPE CONNECTION (CEILING TO WALL)


① Remove the end caps



② Take the led module out and install Line joiners as shown

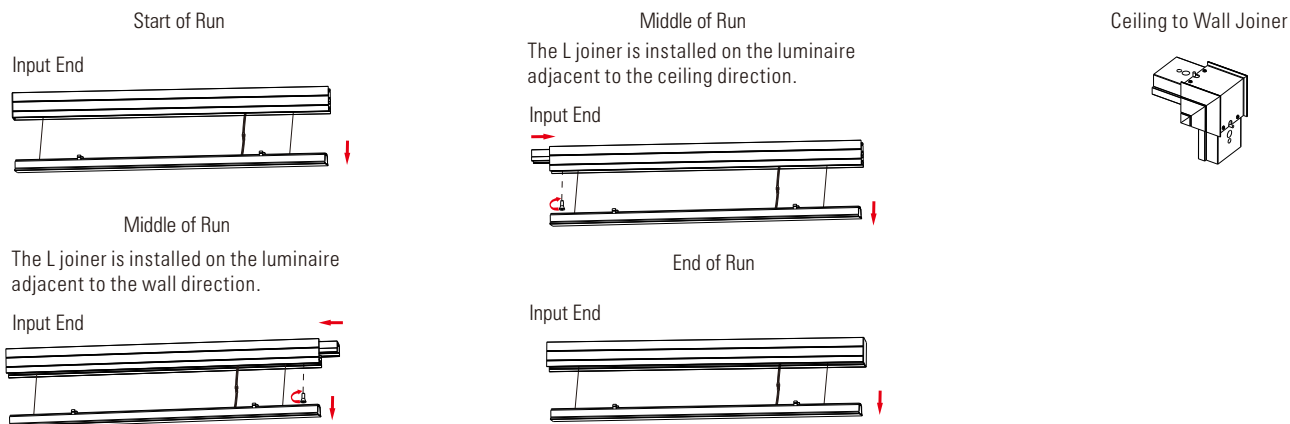

③ Install drywall flange kit (A) and safety stud (H) as shown

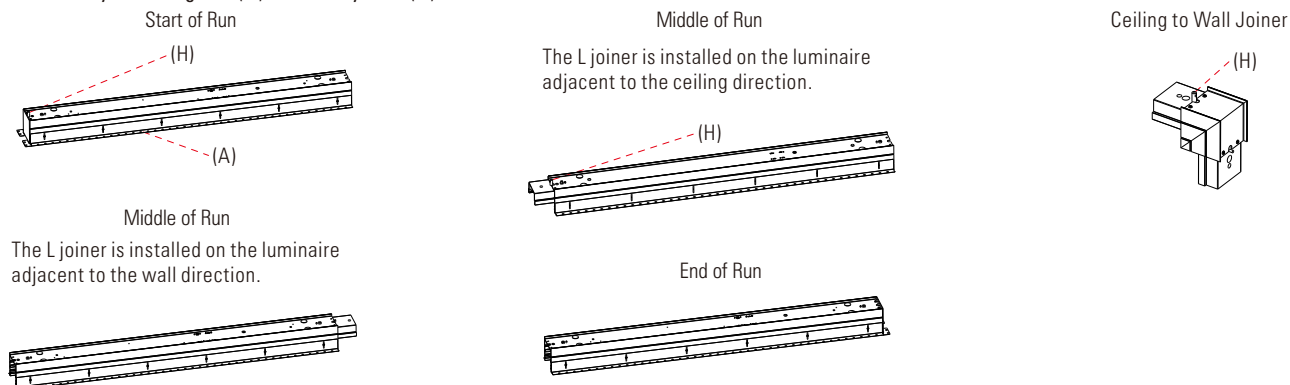

1 Drill a hole in the ceiling and wall

Drill a hole in the ceiling and wall according to the following size :

- ① 2FT: L23.84"×W2.95" (2.3" Width Linear)
L23.84"×W4.37" (3.8" Width Linear)

When continuous runs, each additional 2FT fixture, increase the length by 23.51".

- ② 3FT: L35.85"×W2.95" (2.3" Width Linear)
L35.85"×W4.37" (3.8" Width Linear)


When continuous runs, each additional 3FT fixture, increase the length by 35.51".

- ③ 4FT: L47.86"×W2.95" (2.3" Width Linear)
L47.86"×W4.37" (3.8" Width Linear)

When continuous runs, each additional 4FT fixture, increase the length by 47.52".

- ④ 8FT: L95.38"×W2.95" (2.3" Width Linear)
L95.38"×W4.37" (3.8" Width Linear)

When continuous runs, each additional 8FT fixture, increase the length by 95.04".

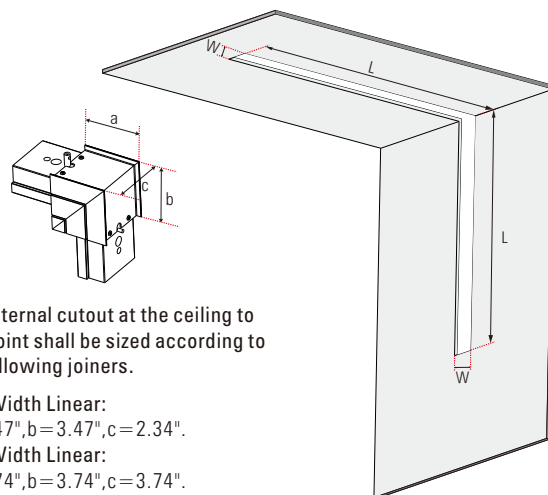


The internal cutout at the ceiling to wall joint shall be sized according to the following joiners.


2.3" Width Linear:
a=3.47", b=3.47", c=2.34".
3.8" Width Linear:
a=3.74", b=3.74", c=3.74".

! RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


- 2 Secure the L joiner to both adjacent lights with screws and connect the terminals.

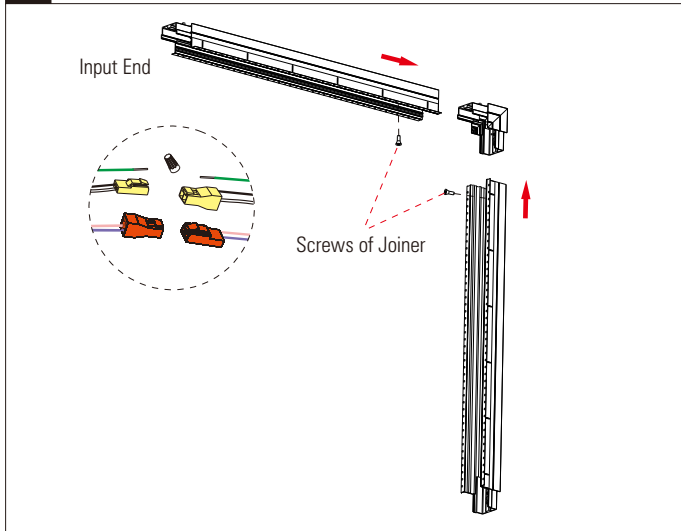


- 3 Secure both ends of the luminaire with safety ropes.

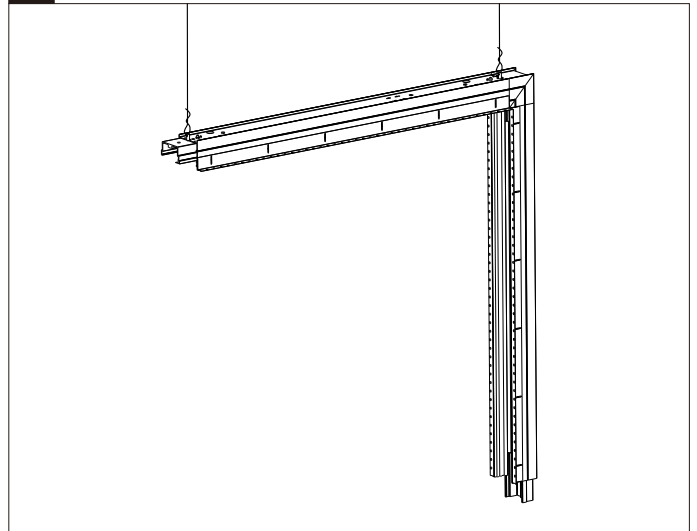


- 4 Wiring to the first luminaire

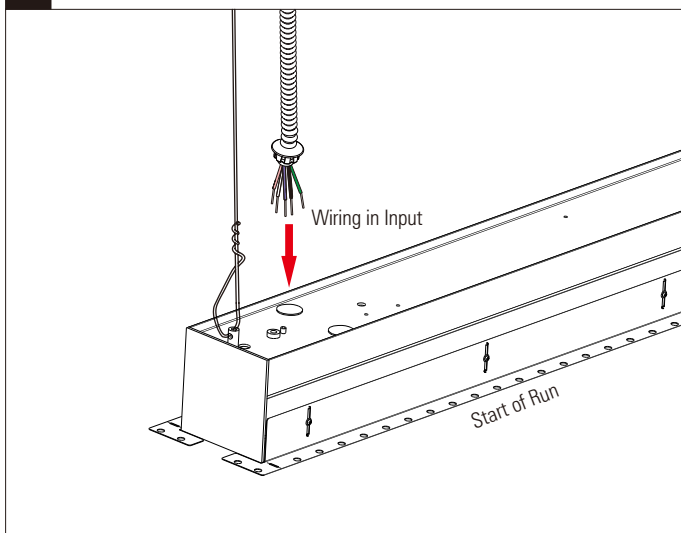


- 5 Insert the light into the ceiling and wall groove, and secure it with screws.

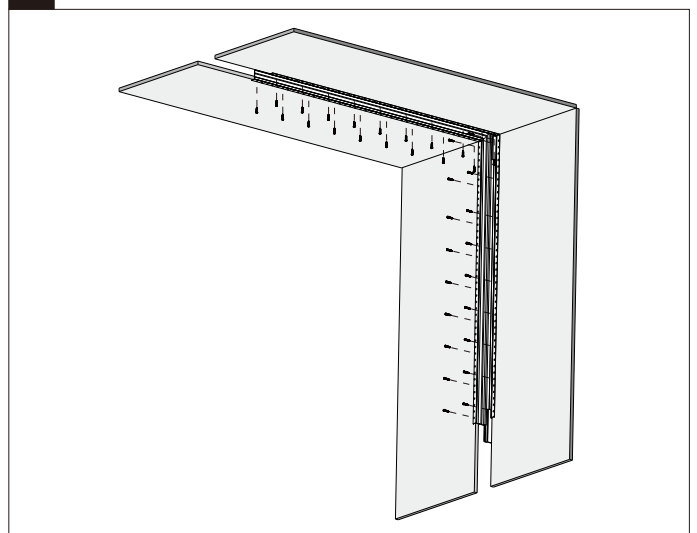

6

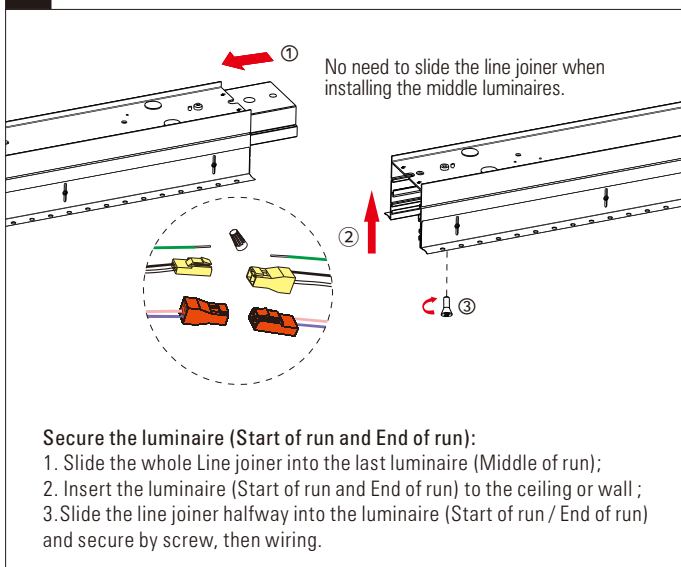

- 7 Secure the first luminaire and last luminaire to the ceiling or wall with screws.

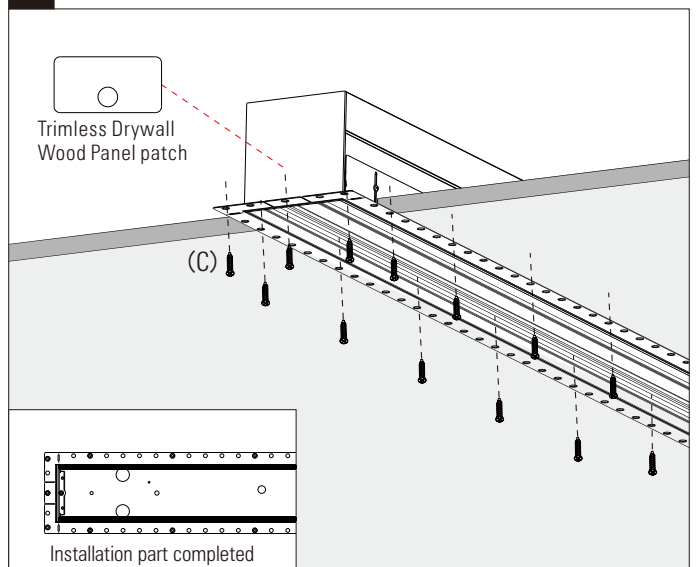

2.3" OR 3.8" WIDTH

RECESSED


LED

ARCHITECTURAL LED LUMINAIRE


DRY CEILING - Trimless Drywall Wood Panel

! RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

8 Plug the LED module into housing

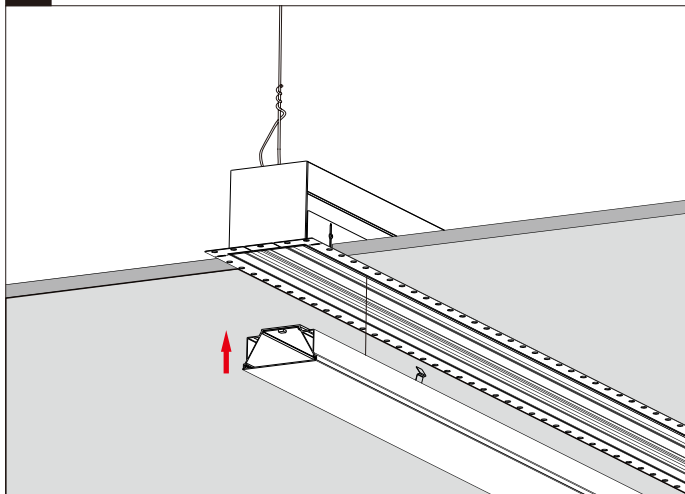

9 Plaster and remove the film on the PC diffuser

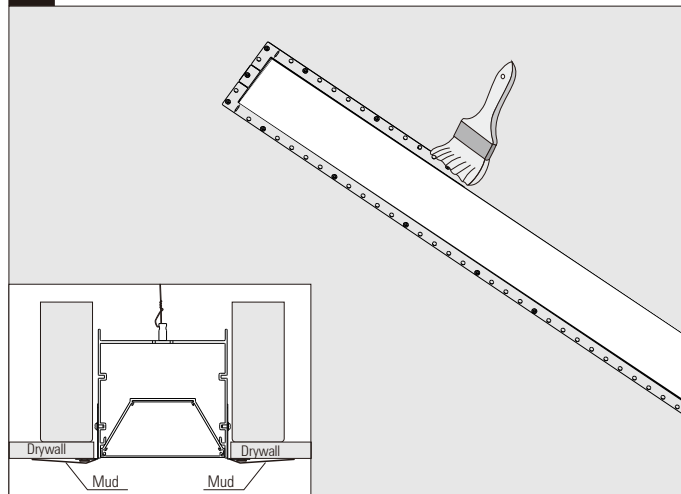

10 Complete

