


ZETA LINEAR

2.3" Bold Linear



Exquisite Clean lines. Sleek styling

This ZE 2.3" direct/Indirect solution does it all, in a system with a small scale 2.3" extruded profile that not only provides straight lines but also well-controlled ambient lighting with separate control of direct and indirect lighting. It's an excellent choice for commercial and retail ambient applications.

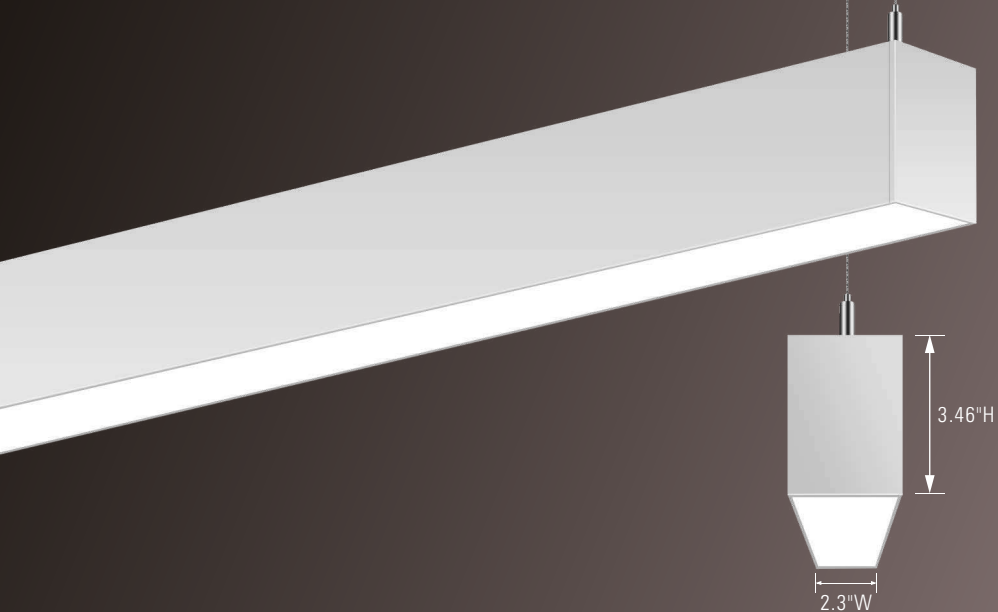

Available in suspended, recessed, surface and wall mount.


Individual units, continuous runs or patterns with 90-degree or 120-degree joiners.

Direct/Indirect light may be specified and controlled independently.

Diffuser, louver, micro reflector and deep regressed lens options.

Lumen output range:

- Direct up to 1050 lumens per foot
- Indirect up to 1150 lumens per foot

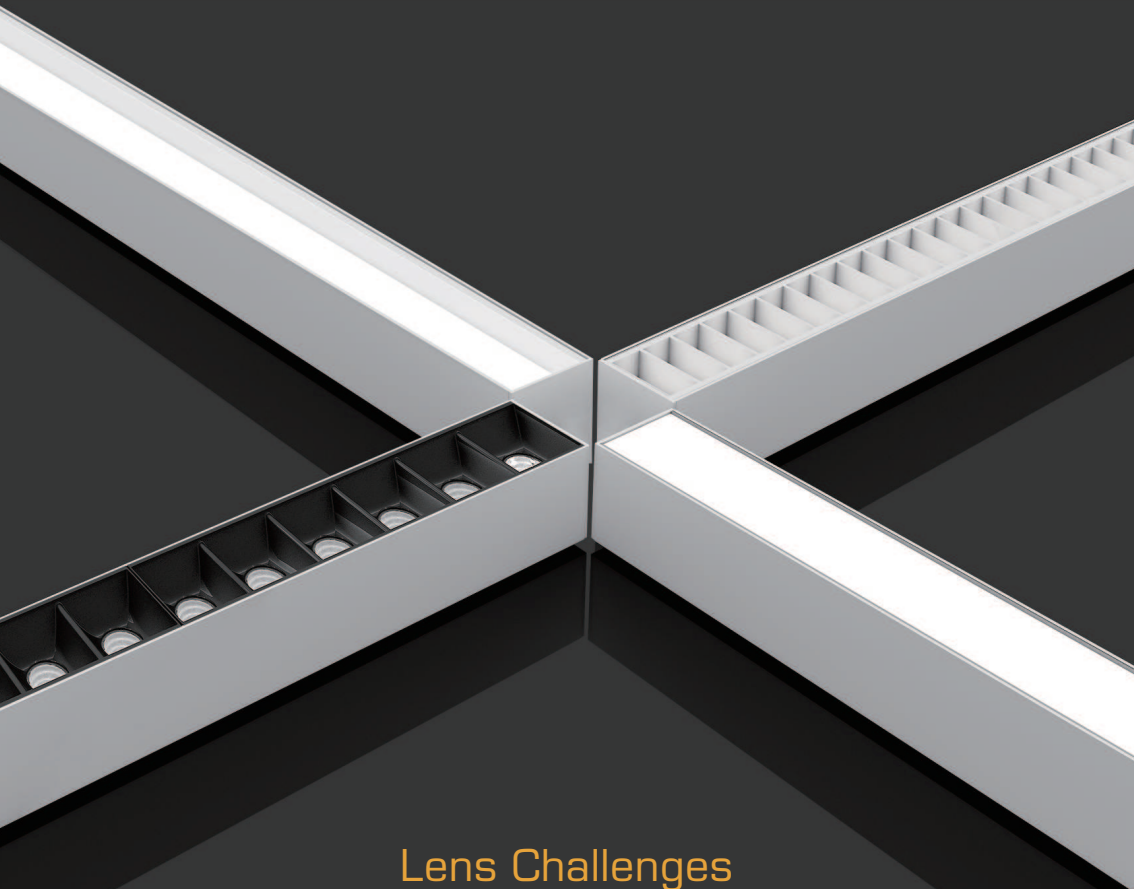


Lens Challenges


Flexibly and sophisticatedly designed, these linear lighting families combine top finishes with professional optics for unparalleled performance.




Diffuser 100°




Diffuser-Wall Wash 100°
(30° Tilt)



Regressed Lens 90°



Reflector 48°



Louver 60°


Effortless Light Distribution

Uniformity, Delivered


The Zeta series delivers smooth direct or indirect lighting, whether suspended or wall-mounted. It enables wider fixture spacing while maintaining excellent ceiling light uniformity. With up to 5 embedded lighting distributions-adjustable via dip switch-and a maximum output of 1000 lm/ft, Zeta offers versatile optics to meet the requirements of even the most demanding applications.

"5-in-1" Lighting Distribution Options:


Indirect

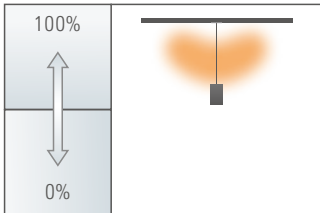


Semi-indirect

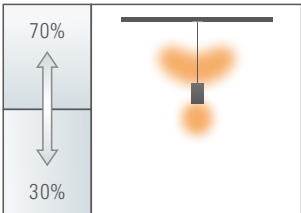


Direct

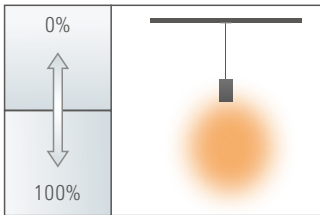

Semi-direct

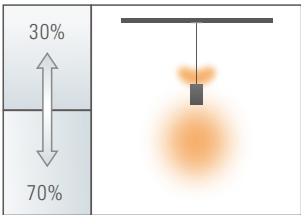

General-diffuse

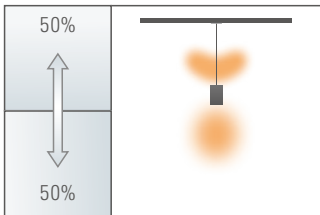





The Art of Design Flexibility

All linear line products offer the freedom to create truly dynamic spaces. 8 joiners make it easy to create multiple fixture configurations for exceptional design flexibility. For additional design flexibility, individual or row-mounted options are available in a variety of run lengths and lamp configurations.





CURVE LIGHT

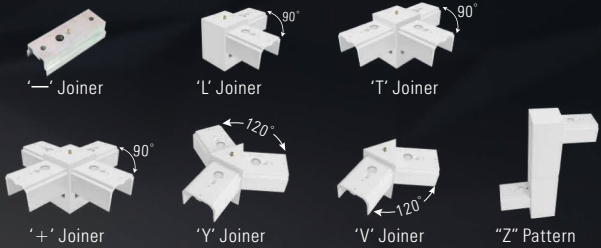

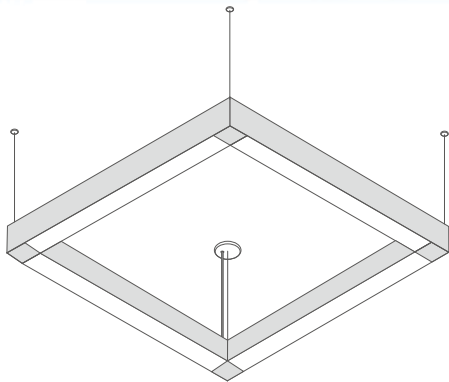

Product Performance

Shape: ☐ Mounting: Suspended	
Qty	Parts
4	4' Linear Light (Direct / Indirect)
4	L Joiner
0	End Cap
4	Suspension Kit
1	4" Power Feed Canopy
3	2" Non-power Feed Canopy
1	AC Cable

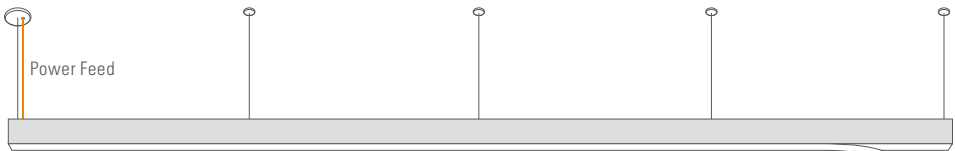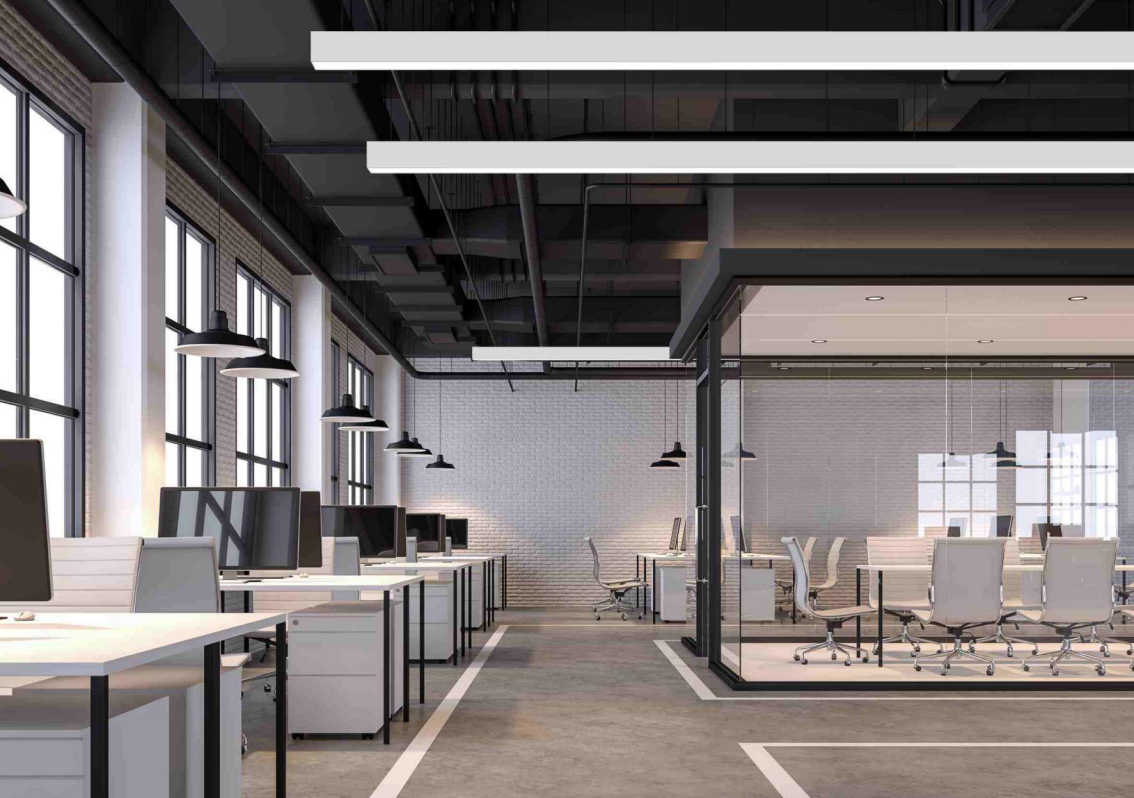

It is linear, available in runs of virtually any length. Each power feed works:


- Up to 40ft in 120V AC.
- Up to 100ft in 277V AC.




40' Continuous Roll

Product Performance

Shape: Line Mounting: Suspended	
Qty	Parts
4	4' Linear Light (Direct / Indirect)
4	— Joiner
2	End Cap
5	Suspension Kit
1	4" Power Feed Canopy
4	2" Non-power Feed Canopy
1	AC Cable
1	40' Continuous Roll-Out Lens

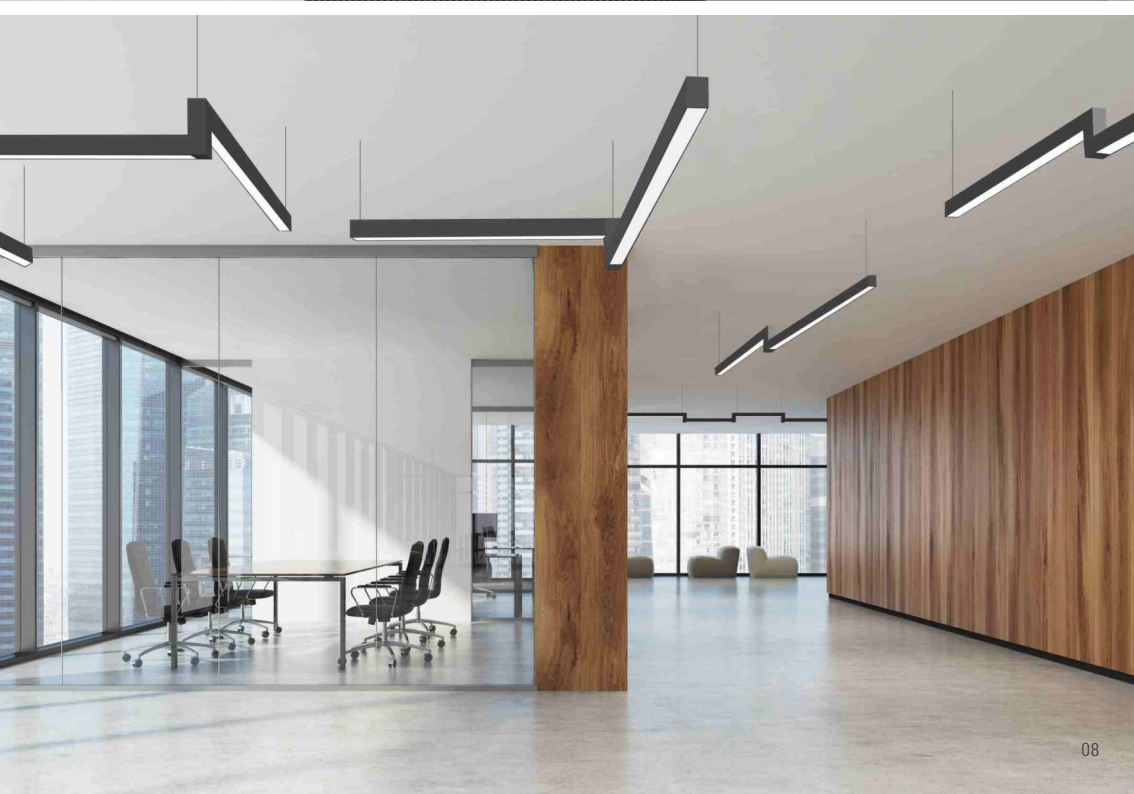

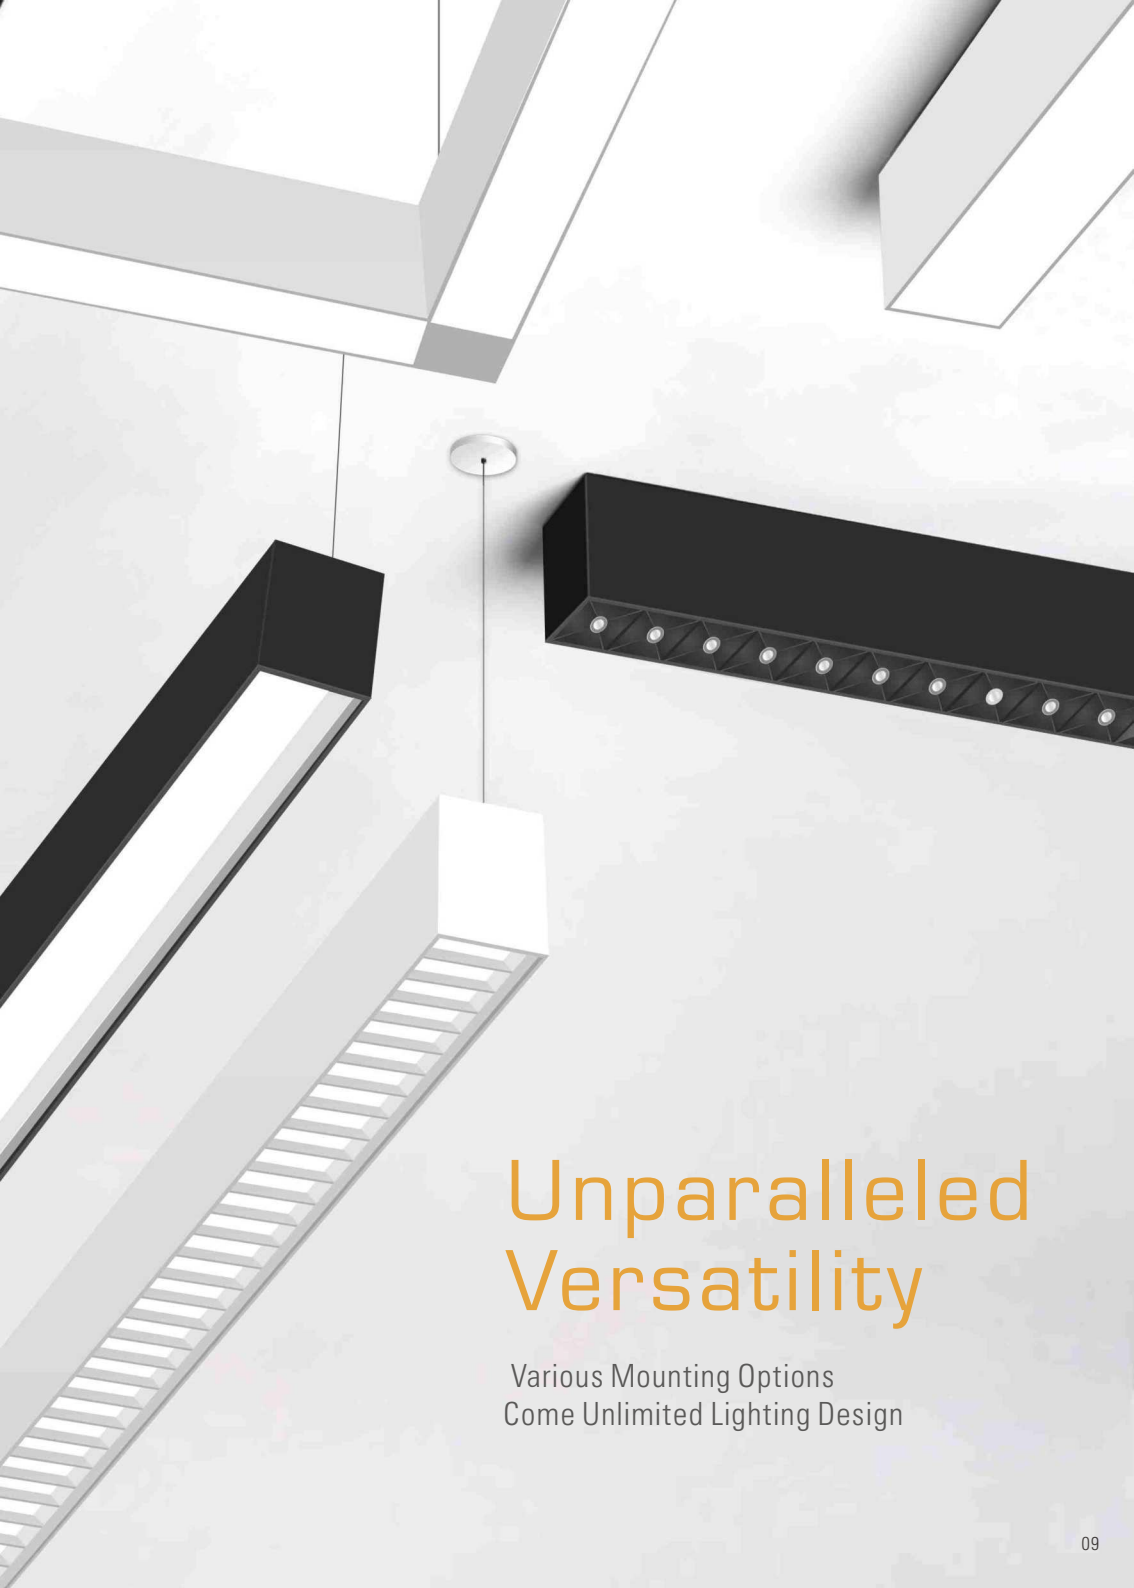

Unparalleled Versatility


Various Mounting Options
Come Unlimited Lighting Design

Various Mounting Options




Suspended

Best suited to spaces with generous ceiling heights. Light up the space to improve comfort with the indirect lighting option and various canopies.

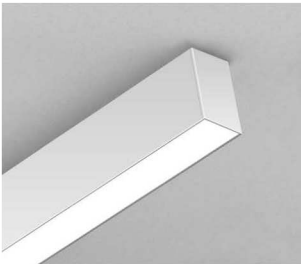

Surface

It is the ideal choice for low ceilings and minimal ceiling spaces. Surface mounted luminaires can be used effectively to enhance architectural features.

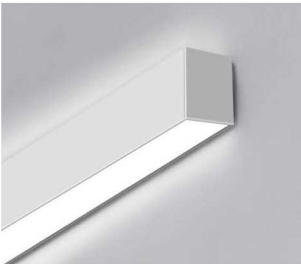

Wall Mount

Delivers visually appealing ambient lighting and enhanced design and application flexibility.

Quick Suspended T-grid/Dry Ceiling Compatible

Canopy Style



1.6" Round
(Non Power Feed)



4.5" Round
(Power Feed)



4.5" Round With
Emergency Driver
(Non Power Feed)



5.8" Round With
Occupancy Sensor
(Power Feed)



1.6" Square
(Non Power Feed)





4.5" Square
(Power Feed)



4.5" Square With
Emergency Driver
(Non Power Feed)


Dry Ceiling / Off Grid



* Please see the installation instruction for more details.

Drop Ceiling / On Grid


Suspending the luminaire in the T-grid. Compatible for various T-grid, including 9/16" Flat, 9/16" Slot, 15/16" Flat.

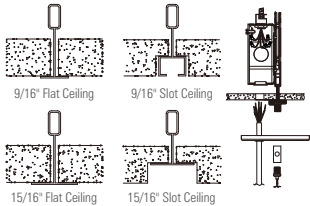




Optional Functions

Timeless Design, Smart Technology

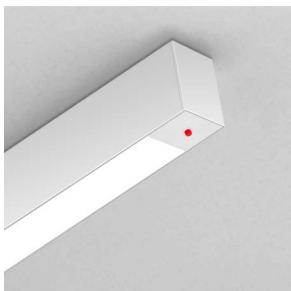


Built-In Emergency Ready

Built-in 8W emergency LED driver ensures automatic illumination during power failures, with simplified wiring to reduce labor costs.

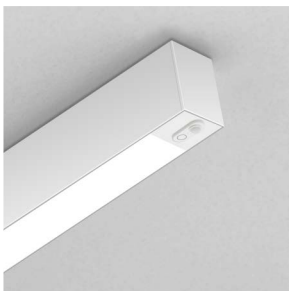


Built-in Sensor

Integrated sensor system enables multi-level control through motion detection and daylight harvesting.

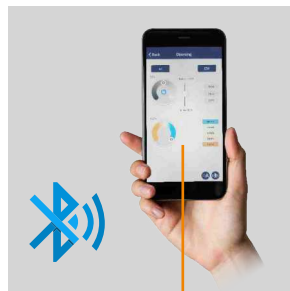

Smart Contact

Smart Control By App Or Wall Switch

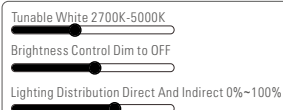









Shenzhen Global HQ
Room G 10/F, Kechuang Building,
Quanzhi Science and Technology
Innovation Park, Houting, Shajing,
Bao'an, Shenzhen, China.
+ 86-755-61157553

Houston North America HQ
2304 Reed Road, Suite 300D, Houston,
Texas 77051
+ 1-832-493-4790
sales@oktlighting.com
www.oktlighting.com

@OKT Lighting. All right reserved. Product
design and development is an ongoing
process by OKT Lighting. We reserve the
right to change specifications. Contact
OKT for the latest product information or
visit website for more.