META SURFACE

Pendant, Surface And Wall Mount
2' / 3' / 4' Linear Portfolio

Gives new meaning to
lighting aesthetic

Aesthetic

Ultra-thin semi-transparent optics, like floating in the air

Mini Internal LED Driver

CCT & Wattage Adjustable By Dip Switch

The Perfect Light For All Purposes

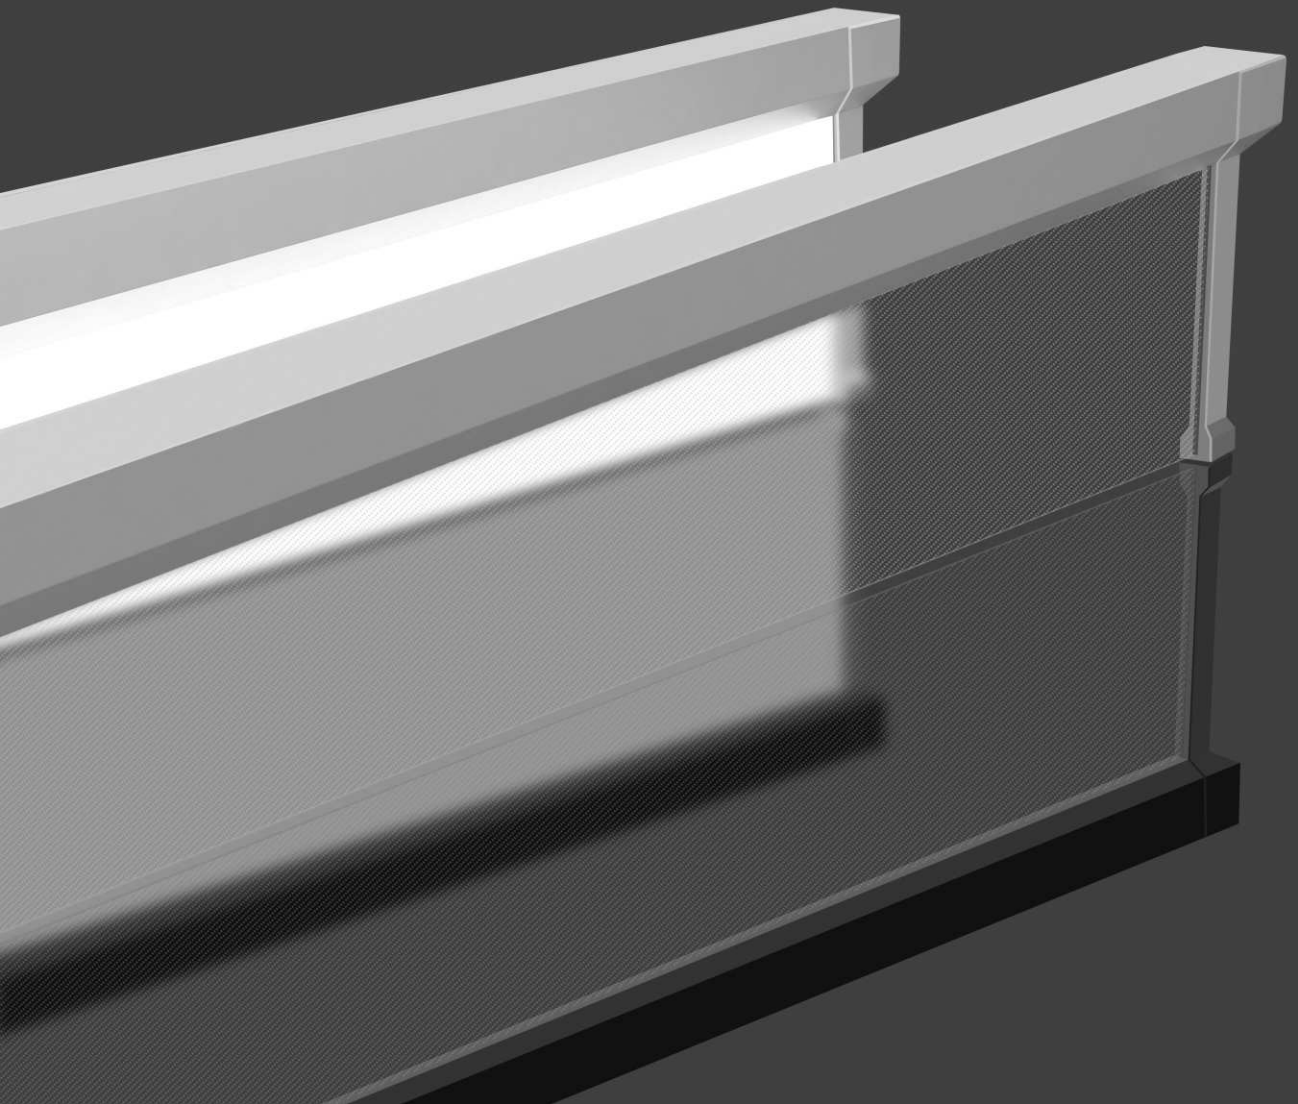

90+ Color Rendering Index

1300 lumen/foot

Our CCT adjustable solutions, and wattage adjustable to maximize light compatibility with internal driver designed.

Adjustable CCT

Adjustable Wattage

Lumen Package

Length	Lumen Package			
	Wattage	3000K	3500K(DLC Qualification)	4000K(DLC Qualification)
2'	20W	1150lm/ft,115lm/w	1250lm/ft,125lm/w	1200lm/ft,120lm/w
3'	20W/30W/40W Selectable	750~1500lm/ft,115lm/w	800~1650lm/ft,125lm/w	800~1600lm/ft,120lm/w
4'	20W/30W/40W Selectable	550~1150lm/ft,115lm/w	600~1250lm/ft,125lm/w	600~1200lm/ft,120lm/w

Unique Design

Meta Surface's eye-catching sloping silhouette end cap adds an elegant finishing touch.

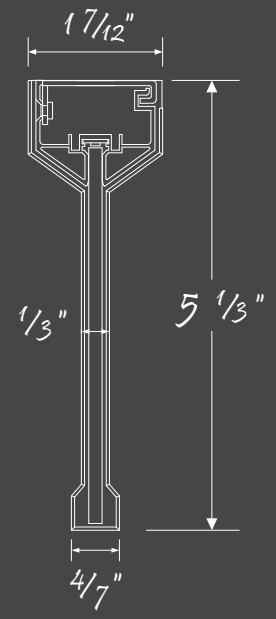

A Step Forward In Ambient Interior Illumination

The Meta Surface's sleek profile is designed to blend into clean, minimalist architectural spaces featuring simple yet powerful lines.

It enables designers to mount the luminaire on walls and ceilings to enhance architectural styling or add a unique flair to the interior design of a space.

With three options built in-house, Meta Surface makes it easy to get the light where you need it with offering new opportunities to capture the beauty and benefits of true lighting.

Sleek Profile

1.59" Wide ■ 5.33" Height ■ 23.64"/ 35.43"/47.24" Lengths

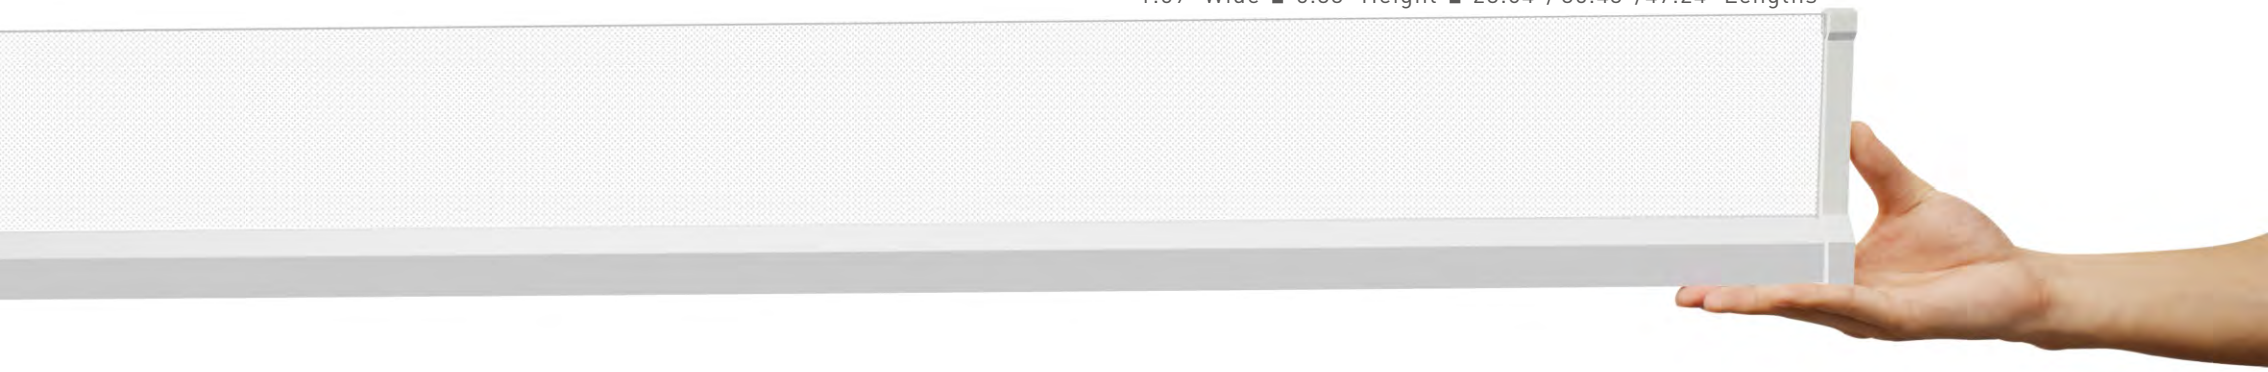

908

Surface Mount

It is attractive and easy to install with simple screws or threaded studs which pass through the housing to fasten the luminaire in place. Ideal for locations with low ceilings or where fire ratings prevent recessed luminaires.

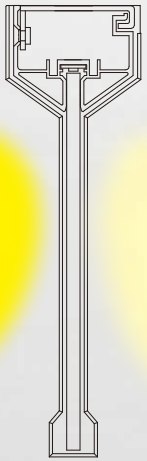

Wall Mount

It is available in a surface reverted design, with a sleek low-profile sensibility optimal for architectural lighting applications without any wall mount bracket, allows for easy installation, ideal for corridors, stairwells, and more.

Meet
the family

Mounting Options

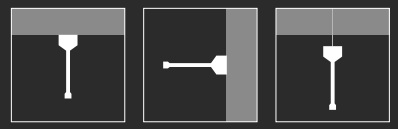

Surface | Wall Mount | Pendant

Function

Input Voltage

110-277V AC
110-347V AC*

CRI

90+

Length

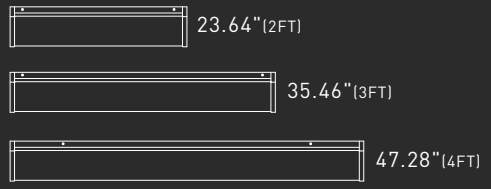

Optics

Ultra-thin semi-transparent vertical optics, enveloped in a signature sloping silhouette where the frame meets the optics.

Finish Options

- White
- Custom Finish

OKT LIGHTING

Shenzhen Global HQ
Room G 10/F, Kechuang Building,
Quanzhi Science and Technology
Innovation Park, Houting, Shajing,
Bao'an, Shenzhen, China.
+86-755-61157553

Houston North America HQ
2304 Reed Road, Suite 300D,
Houston, Texas 77051
+1-832-493-4790

sales@oktlighting.com
www.oktlighting.com

@OKT Lighting. All right reserved.
Product design and development is an ongoing process by OKT Lighting. We reserve the right to change specifications. Contact OKT for the latest product information or visit website for more.