

ZETA 1.8"-Surface



Spec-grade | Architectural LED Linear Lighting



Combining superior esthetics, quality performance and unparalleled versatility, Zeta 1.8" series offers new opportunities to capture the beauty and benefits of true lighting. With a maximum output of 1200 lm/ft and a choice of various lengths, Zeta is capable of delivering the light levels needed for the most demanding applications by CCT adjustable and wattage selectable functions, compatible for dry ceiling and drop ceiling. While simple in appearance.

Feature



- 2 lighting distribution by dip switch
- CCT adjustable and wattage selectable
- Up to 1200 lm/ft
- Continuous runs or Custom pattern
- Surface (Pendant mounted available)
- 3 lengths & 1.8" width with internal driver

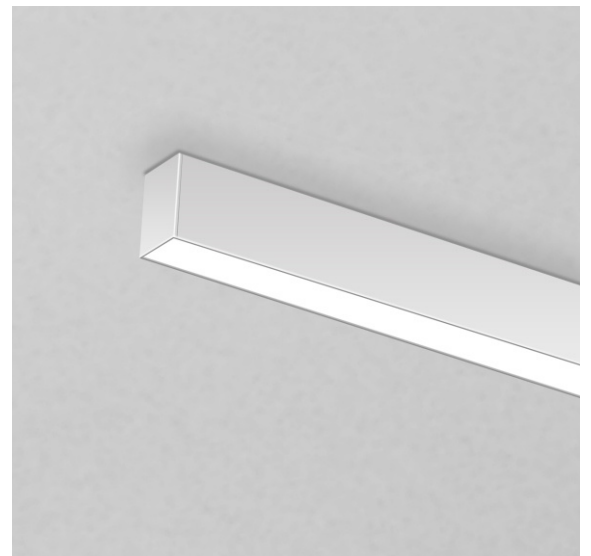

PERFORMANCE

Finish	Length	Wattage Selectable	Lumen (100% down)			Efficacy
			3000K	3500K	4000K	
White	2'	20W/15W/10W	1050~2100lm	1150~2300lm	1100~2200lm	580~1170 lm/ft
	4'	40W/30W/20W	2100~4200lm	2300~4600lm	2200~4400lm	
	8'	80W/60W/40W	4200~8400lm	4600~9200lm	4400~8800lm	
Black	2'	20W/15W/10W	850~1700lm	950~1900lm	900~1800lm	480~970 lm/ft
	4'	40W/30W/20W	1700~3400lm	1900~3800lm	1800~3600lm	
	8'	80W/60W/40W	3400~6800lm	3800~7600lm	3600~7200lm	

* Check the IES file to gain the accurate data.



ZETA 1.8"-Surface

Spec-grade | Architectural LED Linear Lighting



PRODUCT ORDERING GUIDE

Example: ZE4M-WH-40W-D10-90TW-A-DF (Surface)

Default Settings: Maximum wattage, 4000K and 100% down.

ZE					90	TW	A		(Surface)
Product Series	Length	Finish	Wattage	0-10V Dim	CRI	CCT	Lighting Distribution	Down Lens	
ZE ZETA Linear	2M QuickShip 2 Feet Medium	WH QuickShip White	20W QuickShip 20W/15W/10W Selectable for 2ft	D10 QuickShip 110-277V AC Dims to 10% Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-DL.	90 QuickShip 90+ CRI	TW QuickShip CCT adjustable 3000K/3500K/4000K	A QuickShip 100% down or 25%up/75% down by visible Dip switch	DF QuickShip Diffuser	Just to remark the mounting. Don't show in product label.
	4M QuickShip 4 Feet Medium	BL QuickShip Black	40W QuickShip 40W/30W/20W Selectable for 4ft						
	8M QuickShip 8 Feet Medium	CM Make to Order Custom *	80W QuickShip 80W/60W/40W Selectable for 8ft	D01 Make to Order 110-277V AC Dim to 1%*					

OPTIONAL ACCESSORY

Non-lit Joiner			Mounting & Optional Function	
SJ QuickShip Straight Line Joiner (Optional 40' rolling lens)		+J QuickShip "+" Joiner		SMK QuickShip Surface Mounting Kits
TJ QuickShip "T" Joiner		YJ Make to Order "Y" Joiner*		EMI QuickShip Emergency Function (Built-in 8W LED emergency driver and indicator before delivery, only for 4ft and 8ft lengths.)
LJ QuickShip "L" Joiner		VJ Make to Order "V" Joiner *		EME QuickShip Emergency Function (Only external 16w or 25w LED emergency driver with standard indicator available and need field-installed.)

CUSTOM LINE OR SHAPE ORDERING GUIDE

Example: ZEM-S-S08-WH-D10

SHAPE/LENGTH* (CHOOSE 1 & ENTER LENGTH IN FEET)			Finish	0-10V Dim			
ZEM-S-C ___ Individual 6ft/ up to 8ft Continuous Run Section (Enter length in product code above, ex. C18) QuickShip			WH QuickShip White	D10 QuickShip 110-277V AC Dims to 10%			
ZEM-S-S ___ Square Configuration (Enter side length A, ex: S18) QuickShip			BL QuickShip Black	<i>Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-DL.</i>			
ZEM-S-R ___/___ Rectangular Configuration (Enter side lengths A and B, ex. R12/24) QuickShip			CM Make to Order Custom *	D01 Make to Order 110-277V AC Dim to 1%*			
ZEM-S-L ___/___ L-Shaped Configuration (Enter side lengths A and B, ex. L12/24) QuickShip							
ZEM-S-T ___/___/___ T-Shaped Configuration (Enter side lengths A, B and C, ex. T02/02/04) QuickShip							
ZEM-S-X ___/___/___/___ Cross-Shaped Configuration (Enter side lengths A, B,C and D, ex. X02/02/02/02) QuickShip							
ZEM-S-Y ___/___/___ Y-Shaped Configuration (Enter side lengths A,B and C, ex. Y04/04/04)* Make to Order							
ZEM-S-H ___ Hexagon-Shaped Configuration (Enter side lengths A, ex. H4)* Make to Order							
 (C) Continuous Run (Line Joiner)	 (S) Square (L Joiner)	 (R) Rectangular (L Joiner)	 (L) L-Shaped (L Joiner)	 (T) T-Shaped (T Joiner)	 (X) Cross-Shaped (+Joiner)	 (Y) Y-Shaped* (Y Joiner)	 (H) Hexagon* (V Joiner)
			*Make to Order means additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information.				
			Damp rated for ambient operating temperature of				

Shape orientation Looking from the Ceiling down to the floor.
All corners of shape must be 90° or 120°, same plane. joiners and rolling lens will be included.
FOR more complex shape, CONTACT OKT.

*Make to Order means additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information.


Damp rated for ambient operating temperature of
-20°C to +40°C (-4° to +104°F)

ZETA 1.8"-Surface

Spec-grade | Architectural LED Linear Lighting




DIMENSIONS

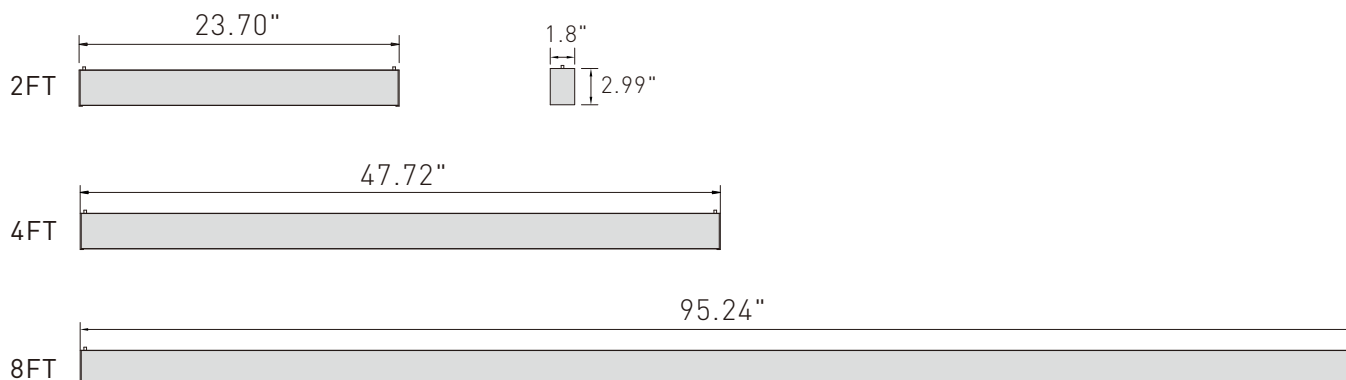

OPTIONAL FUNCTION

► Emergency Option


OKT Lighting offers UL& CEC Listed LED emergency drivers. They could be factory installed or field installed. When AC power fails it, immediately switches to the emergency mode operating for lighting minimum 90 minutes. When AC power is restored it, automatically returns to the charging mode which meets critical life-safety lighting requirements.

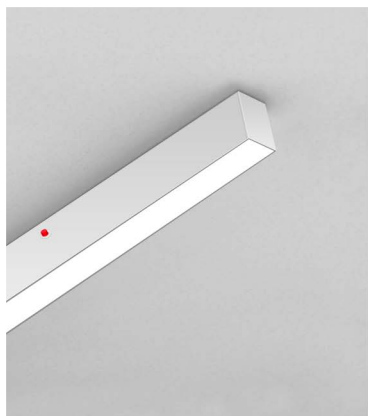

EMI

Built-in LED emergency driver

OKT Lighting offers the LED luminaire with built-in 8w LED emergency driver to provide critical illumination when normal power fails for any reason. It can save your labor cost with simple wiring.



Specification For LED Emergency Driver

Output Power	8 Watts
Output Voltage	20-54V DC
Input Current	70 mA Max (120V)
Input Power	4.5 Watts Max (120V)
Input Voltage	110-277VAC, 50-60Hz
Emergency Operation	≥90 Minutes
Standby Power	< 0.4W
Operating Temp	0°C to 50°C
Battery	Lithium
Recharge	24 Hrs
Certificate	UL , CEC



EME

Order Separated LED emergency driver

Optional 16w or 25w high voltage LED emergency driver can be provided if you need and do it wiring in field. For more info or spec sheet please visit our, website or contact sales.




Features:

- Field-installable (UL Listed for US & Canada).
- Energy-efficient charger (CEC Title 20 compliant).
- Premium battery backup – 90+ minutes runtime during outages.
- Backed by a 5-Year Limited Warranty.
- Supports most LED luminaires (Up to 200W).
- Universal input voltage (100–277V AC).
- Automatic self-diagnostic testing with monthly, semi-annual, and annual checkups.

DISTRIBUTION DIAGRAM

4' / Diffuser/100% Down/3000K

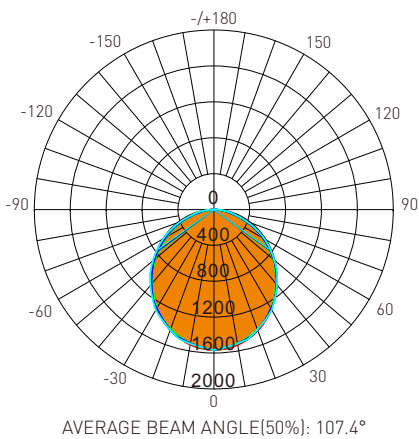

Lumens: 4175.42 Lm
Watts: 40 W
LPW: 107.97 Lm/W
CCT: 3000K
UNIT: cd
C0/180, 107.7°
C30/210, 105.9°
C60/240, 107.1°
C90/270, 108.9°

Zonal Flux Diagram

T	C0	C45	C90	C135	C180
5	1556	1543	1539	1542	1555
10	1532	1513	1514	1513	1528
15	1490	1475	1490	1475	1487
20	1433	1430	1423	1432	1429
25	1363	1353	1356	1359	1360
30	1282	1268	1290	1277	1277
35	1190	1180	1192	1194	1186
40	1090	1086	1095	1093	1087
45	984.1	972.8	997.1	903.1	982.0
50	871.7	859.5	880.8	717.3	870.4
55	756.0	747.0	764.5	563.3	753.9
60	634.8	616.5	648.3	465.0	633.8
65	510.5	488.9	519.9	373.3	510.2
70	384.1	361.7	391.5	283.0	384.4
75	259.5	235.0	263.1	194.8	257.1
80	141.1	120.8	176.0	115.2	139.2
85	43.64	60.87	88.86	59.69	25.85
90	0.7283	2.885	1.718	5.544	3.443
95	1.779	2.816	1.973	4.765	0.5225
100	1.956	2.742	2.228	4.015	0.7466
105	2.181	2.862	2.483	4.599	1.017
110	2.418	2.997	2.832	5.326	1.321
115	2.619	3.078	3.181	5.658	1.638
120	2.871	3.146	3.530	5.661	1.941
125	3.091	3.239	3.785	5.580	2.264
130	3.306	3.442	4.039	5.066	2.544
135	3.530	3.716	4.294	4.649	2.810
140	3.712	4.043	4.347	4.380	3.043
145	3.880	4.233	4.400	4.376	3.277
150	4.029	4.362	4.453	4.417	3.557
155	4.127	4.466	4.439	4.556	3.795
160	4.230	4.512	4.426	4.705	3.991
165	4.318	4.405	4.412	4.765	4.164
170	4.318	4.354	4.374	4.534	4.290
175	4.248	4.286	4.337	4.390	4.397
180	4.300	4.300	4.300	4.300	4.458
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens

T	φ total
0-5	37.10
5-10	146.5
10-15	324.3
15-20	563.8
20-25	855.4
25-30	1189
30-35	1552
35-40	1932
40-45	2314
45-50	2684
50-55	3028
55-60	3337
60-65	3603
65-70	3818
70-75	3977
75-80	4081
80-85	4138
85-90	4157
90-95	4158
95-100	4159
100-105	4160
105-110	4162
110-115	4163
115-120	4164
120-125	4166
125-130	4167
130-135	4168
135-140	4170
140-145	4171
145-150	4172
150-155	4173
155-160	4174
160-165	4174
165-170	4175
170-175	4175
175-180	4175
UNIT: lm	

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	9446	19236
80	15327	19123
75	18920	19183
70	21187	21598
65	22791	23210
60	23954	24462
55	24868	25149
50	25588	25854
45	26258	26605