


RECESSED

ZETA 2.3"

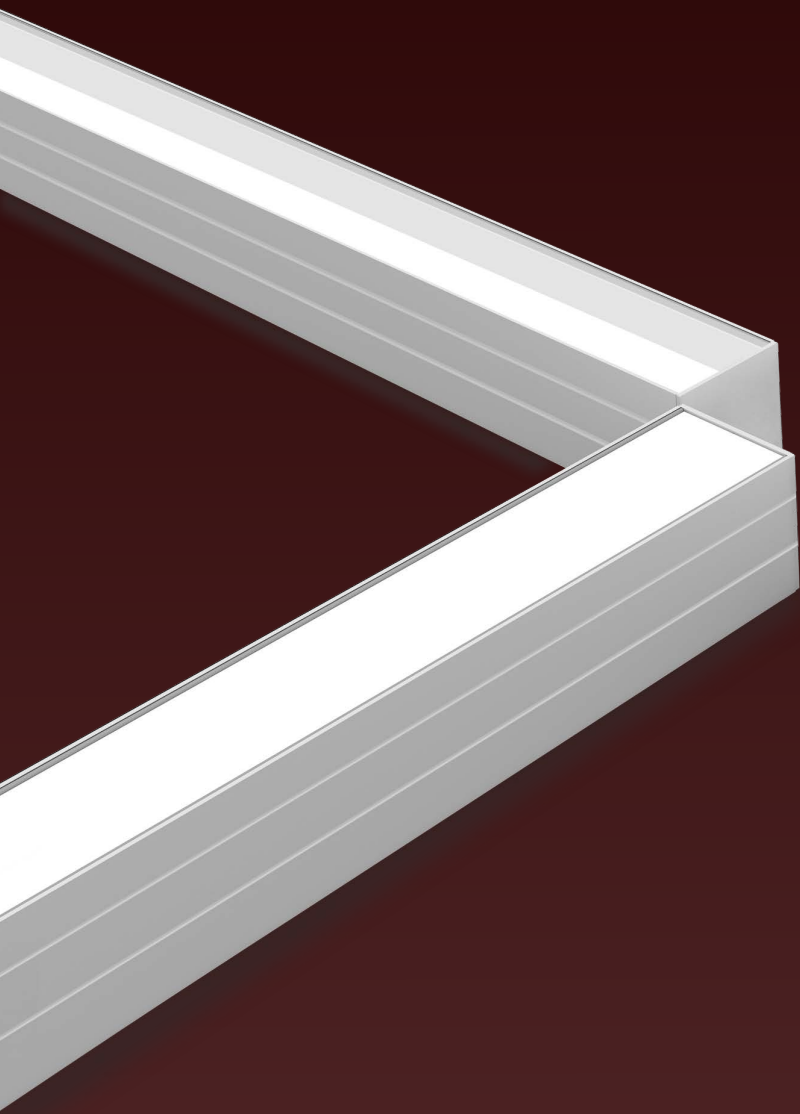

ZETA 2.3" RECESSED

Minimal Width Maximum Performance

It is an architectural lighting solution that compliments the ceiling and entire space while providing comfortable general illumination. Sleek and simple, thin lines of light integrate with architecture for maximum impact and design flexibility. It is an ideal for a variety of indoor applications including offices, institutions and commercial spaces. Installation and maintenance are made easy and access to all components from below.

Trimless design or flanged trim options

T-grid/drywall ceiling compatible

Flat, regress lenses are available

Seamless continuous runs or custom pattern with 2',3' and 4' lengths options

Illuminated corner

CCT & wattage adjustable
Up to 1000lm/ft





It has flat and regressed lenses options with wattage and CCT adjustable for scalability. Easy install in the field which is compatible for dry ceiling or T-grid ceiling.


Recessed In Dry Ceiling

Drywall Flange


It is an innovative LED luminaires designed to deliver a modern aesthetic and complement today's interior spaces, perfect for high-end drywall applications requiring a small profile with seamless lines of light and no pixels or shadows.

Trim Drywall


Recessed with pendant stem

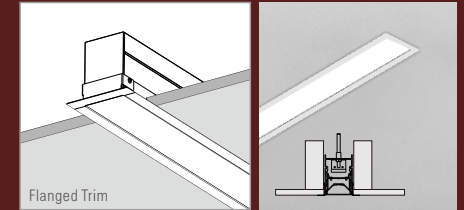

Trimless Drywall Wood Panel

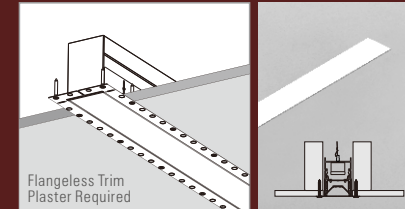


Recessed with brackets

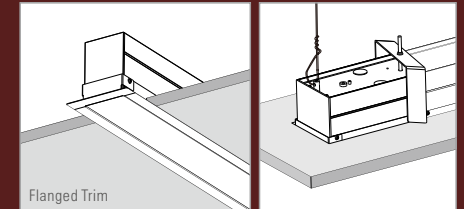


Recessed In Grid Ceiling

T-Grid Hook


ZETA 2.3" luminaires offer grid mount which can fit easily in a variety of T-Grid ceiling types, allowing to be fully and seamlessly integrated into 9/16" flat, 9/16" slot or 15/16" flat T-grid ceiling types. It supports to be installed in individual or seamless continuous runs.




Trimless

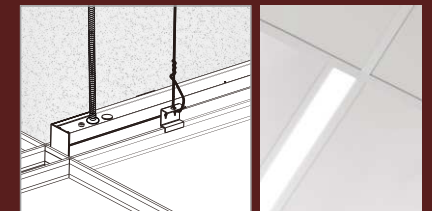

Trim

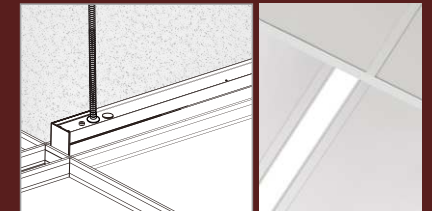

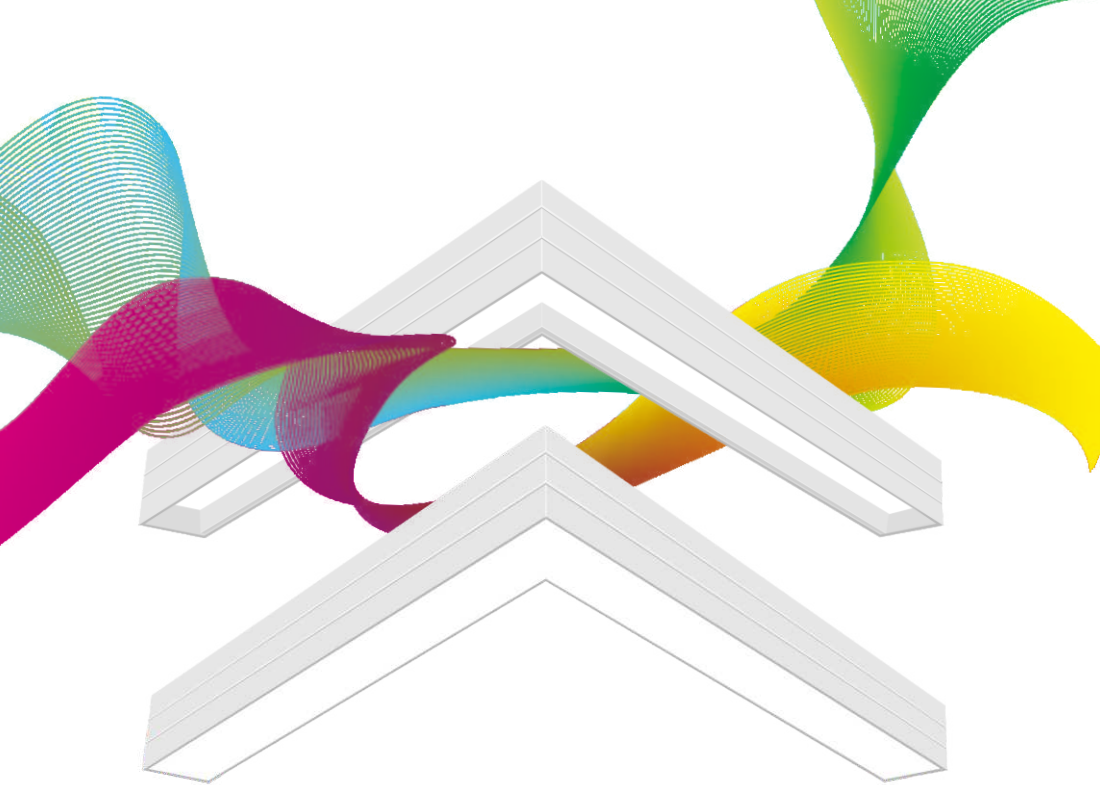

An Evolution In Design Freedom Creative • Powerful

ZETA 2.3" offers new opportunities to capture the beauty and benefits of architectural recessed linear lighting that can add rhythm, beauty and creativity to the ceiling plane, while providing opportunities for customized lighting design. With their streamlined aesthetics and uniform soft illumination, you can enjoy freedom from traditional ceiling footprints and allows you to enhance modern interiors.

Simple Installation

Fits easily in a variety of T-grid, drywall trimless applications.

Continuous Runs

Seamless with Line joiner with no socket shadows or hot-spots.

Custom Pattern

Optional L illuminated joiner enables superior lighting design flexibility.

Create a cleaner ceiling
by trimless design





A Winning Combination

ZETA 2.3 recessed, is the perfect blend of lighting performance and timeless aesthetic. It is stocked with wattage & CCT adjustable, you can fulfill more orders with fewer SKUs! It is also compatible for more essential functions to meet your different needs, including the occupancy sensing modular or emergency modular to provide critical illumination when normal power fails for any reason, allowing projects to remain well under lighting power allowances and comply with building energy codes.

CCT Adjustable 3000K/3500K/4000K

Wattage Selectable 100%/75%/50%

Occupancy Sensor Option

Emergency Option



Copyrighted Images

OPTIONAL FUNCTION

► Integral Sensor Options

Lighting Distribution	Function	Sensor Options
  	 Dimming Only	 ☐ A-WN-D01-RF-WH Athena wireless node (RF only) (White) QuickShip ☐ A-WN-D01-RF-BL Athena wireless node (RF only) (Black) QuickShip ☐ A-WN-D01-OCC-WH Athena wireless node with sensor (White) QuickShip ☐ A-WN-D01-OCC-BL Athena wireless node with sensor (Black) QuickShip
		☐ IFS06R.B1 (Remote Control) QuickShip Fixture Built-in Low Bay Sensor ☐ IFS108.B2 (App) QuickShip Integrated Oval 12V Panel Sensor, 0-10V, Daylight Harvesting, PIR, 5.0 BLE
		 ☐ A-WN-D01-RF-WH Athena wireless node (RF only) (White) QuickShip ☐ A-WN-D01-RF-BL Athena wireless node (RF only) (Black) QuickShip ☐ A-WN-D01-OCC-WH Athena wireless node with sensor (White) QuickShip ☐ A-WN-D01-OCC-BL Athena wireless node with sensor (Black) QuickShip
		 ☐ IFS108.B1 (App) QuickShip Integrated Oval 12V Panel Sensor, Dual 0-10V, Daylight Harvesting, PIR, 5.0 BLE

For more info or spec sheet please contact sales.

► Emergency Options


Location	Wiring Type	Emergency Options
EMI Built-in	DC Wiring	 ☐ EM-S0854-RBN QuickShip 8W output for 90+ minutes runtime during outages
EME External Wiring in Field	AC Wiring	 ☐ EM-H16170-RBF QuickShip ☐ EM-H25170-RBF QuickShip 16W or 25W output for 90+ minutes runtime during outages

For more info or spec sheet please visit <https://www.oktlighting.com/collections/led-emergency-driver> or contact sales.


Recessed+ Suspended + Surface Mount

Versatility

Mounting Options



Lighting Distribution



Performance




Luminaire Specs

- 500~1000lm/ft
- 90+ CRI
- 110-277V AC standard, 110-347VAC option
- White or black finish
- 0-10V dim, 10% or 1% options


Approvals

- cULus listed for damp locations
- 5 years limited warranty

Dimensions

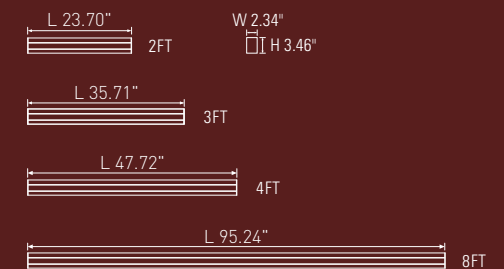

Optional Accessory

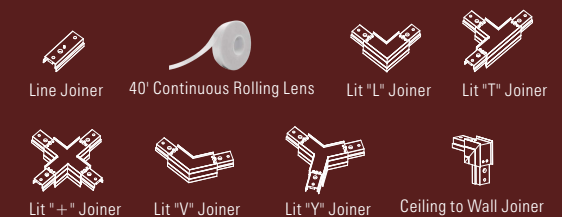

Optional Function

- Emergency
- Occupancy Sensor

**Additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information.*

Please be advised that certain photos featured within our catalog are copyrighted images, and therefore hold exclusive rights for use. If utilizing these photos for marketing purposes, it is imperative to purchase the proper right of use from the appropriate copyright holder. Failure to do so may result in infringement. Please note that we can provide a purchase link upon request. Thank you for your understanding.