



ZETA 2.3"

Wall Wash | Architectural LED Linear

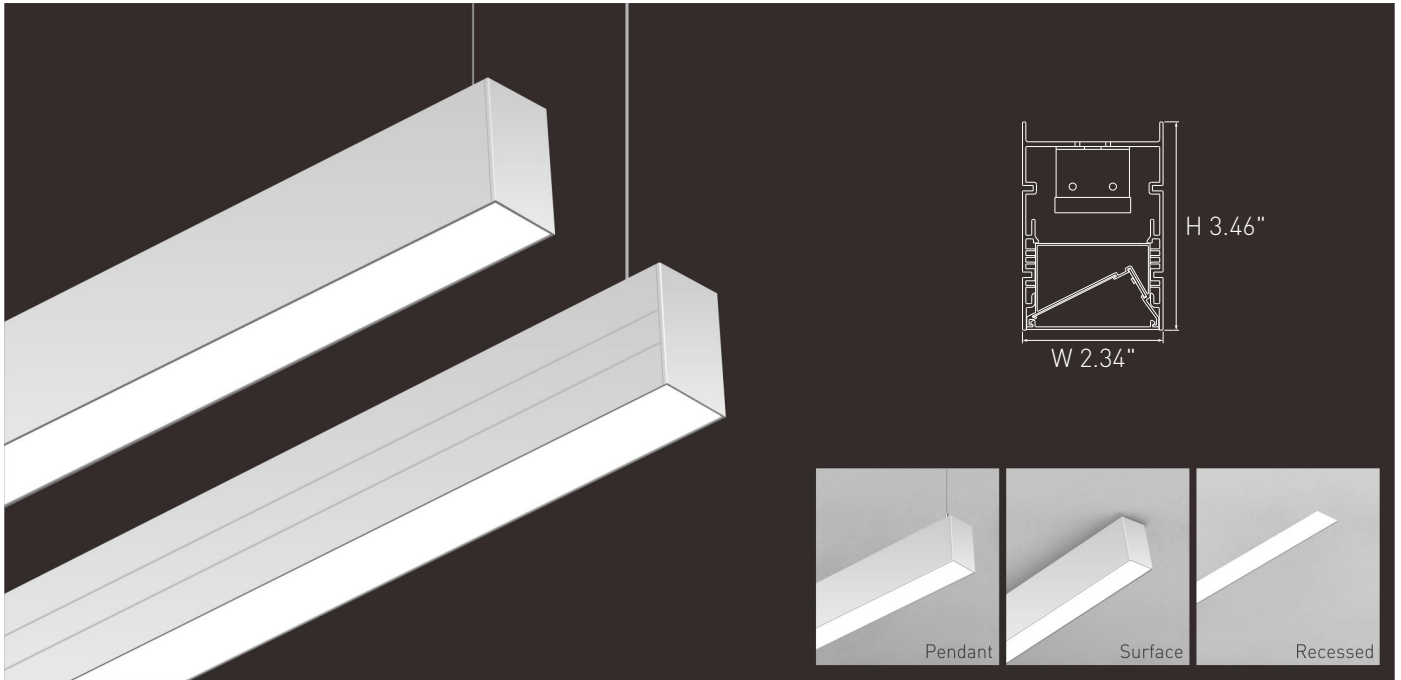

OKT ZETA 2.3" Wall Wash series is a unique linear series that brings any space to the center stage. These timeless, streamlined forms blend well with contemporary decors and modern workplaces. These linear luminaries is available in 2ft, 3ft, 4ft and 8ft, simply provide wide, powerful lighting to any atmosphere with continuous runs. It can provide smooth uplight and downlight, allowing for wider spacing between fixtures and better ceiling light uniformity.

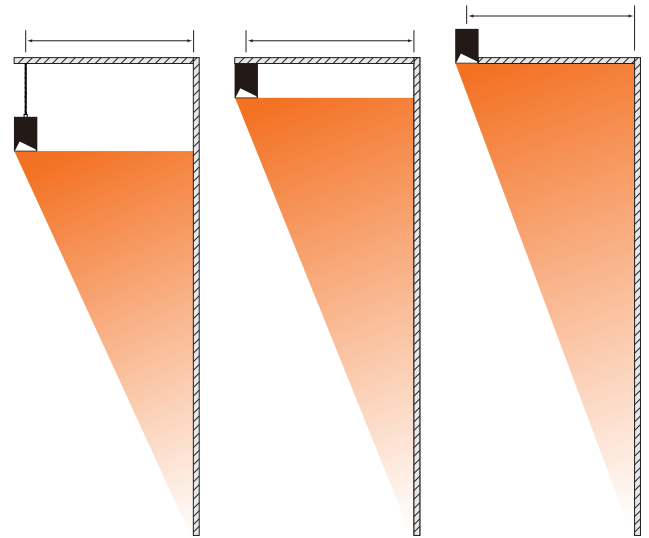

18"-30" Recommended Distance from Wall

Feature


- Wall wash, 30° tilt for accent lighting
- Integrated suspended, surface and recessed in ONE housing
- Seamless continuous runs, up to 42'
- 7 Direct/Indirect lighting distributing options
- CCT & wattage adjustable, up to 1200lm/ft
- 2', 3', 4' and 8' length options



PERFORMANCE

Lens	Lumen Package		
	High	Medium	Low
Diffuser	1150lm/ft, 10w/ft	860lm/ft, 7.5w/ft	575lm/ft, 5w/ft

Above are subject to 3500K. All efficacy is ±5% base on different CCT and wattage. Check the IES file to gain the accurate data.

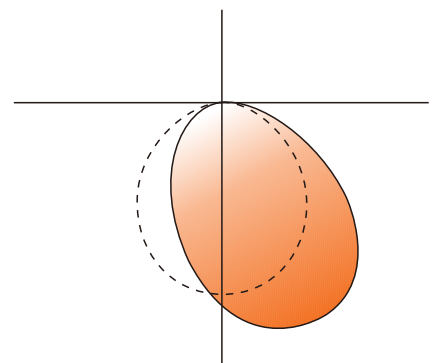

ZETA 2.3"

Wall Wash | Architectural LED Linear



PRODUCT PERFORMANCE

► Optics

Diffuser for wall wash, 30° tilt for accent lighting.

► Finish

- Extruded aluminum housing.
- Powder coat white and black finish or custom.

► Electrical

LED Driver	It is powered by Class 2 high efficiency LED driver, with a standard 1-10V dimming which continuous dims to 10% that works with many types of controls. Tested Dimmers: Lutron ® Diva-Dvtv, Leviton ® IP-710-DL.
THD	<20%
Power Factor	>0.9
Input Voltage	Standard electronic drivers are cULus recognized and available for 110-277V or 110-347V*AC.
Environment	Environment damp rated for ambient operating temperature of -20°C to +40°C (-4° to +104°F).

► LED System

CRI Minimum 80 color rendering index.
CCT CCT adjustable from 3000K,3500K and 4000K.

► Mounting

- Available in pendant, surface and recessed.
- Pendant-Cable lengths of 5ft is standard, 12ft or others are available.
- Individual or continuous run, up to 40ft in 120V AC, 100ft in 277V AC.

► Approvals

- cULus listed for damp locations
- Five-year limited warranty for parts and components. (Labor not included)

► Optional Function

Emergency Option
Optional high voltage emergency LED driver can be provided. When AC power fails, it immediately switches to the emergency mode, operating for lighting up to 120 minutes. When AC power is restored, it automatically returns to the charging mode which meets critical life-safety lighting requirements.
For more info or spec sheet, please visit our website or contact sales.


Occupancy Sensor
We can provide a factory-installed integrated sensor system for multi-level control based on motion and/or daylight contribution with BR1810BI-level & daylight harvest microwave sensor from SHARKWARD. For more info or spec sheet, please contact sales.



PRODUCT ORDERING GUIDE

Sample

ZE-4 2 - 1 TW AW



1. Base Model

ZE ZETA Series

2. Length

2 2 feet 3 3 feet 4 4 feet 8 8 feet

3. Width

2 2.3 inch

4. Driver

I Internal

5. CCT

TW CCT Adjustable (3000K,3500K,4000K)

6. Light Distribution

AW Wall wash with 7 lighting distributions options by dip switch
100% Uplight 10% down, 90% up 30% down, 70% up
50% down, 50% up 70% down, 30% up 90% down, 10% up
100% Downlight

RW Wall wash with 100% downlighting



OPTIONAL ORDERING GUIDE

Mounting

- Pendant in Drywall (Mount to J-box)
- Pendant in Drop Ceiling (Suitable for 9/16" and 15/16" Flat Ceiling)
- Pendant in Drop Ceiling (Suitable for 9/16" Slot Ceiling)
- Pendant in Drop Ceiling (Suitable for 15/16" Slot Ceiling) *
- Surface Mounted
- Recessed in Drywall with Recessed Brackets - Trim
- Recessed in Drywall with Stem Pendant - Trim
- Recessed in Drywall - Trimless
- Recessed in T-Grid Ceiling

Optional Accessory

- Line Joiner
- Occupancy Sensor (Order Separated)
- Rolling Diffuser (42')
- LED Emergency Driver (Order Separated)


*Additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information.

ZETA 2.3"

Wall Wash | Architectural LED Linear




DIMENSIONS

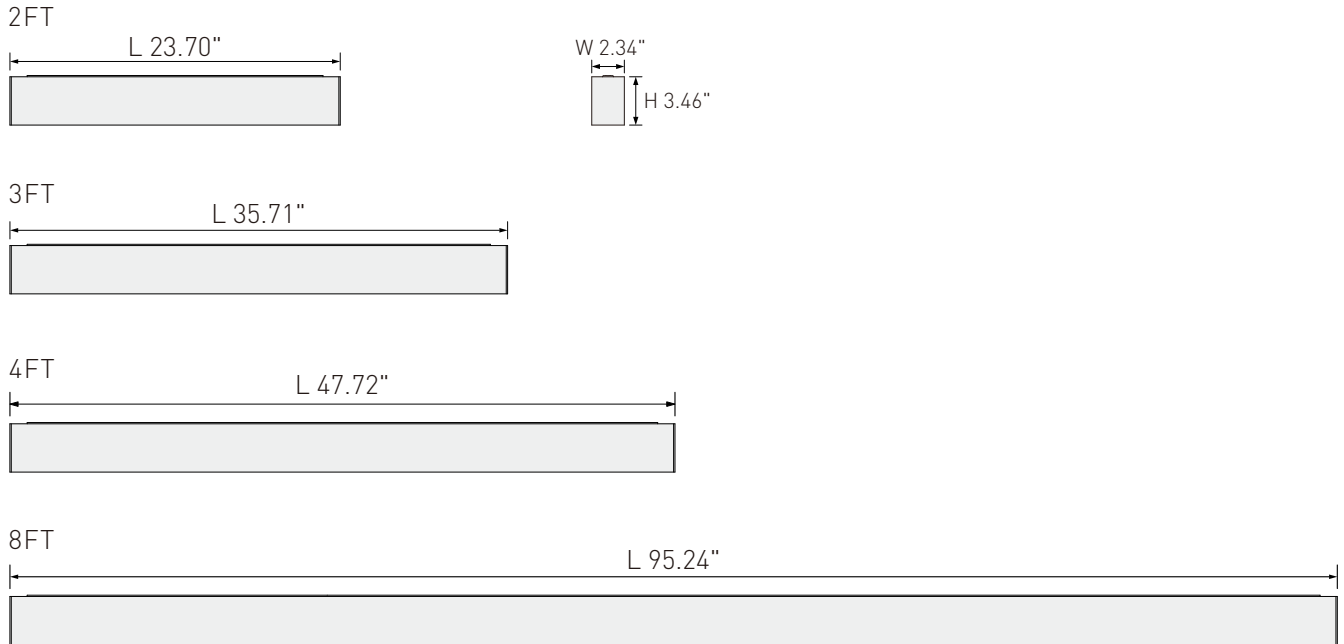

DISTRIBUTION DIAGRAM

4' / Diffuser/50% Up,50% Down/ 4000K

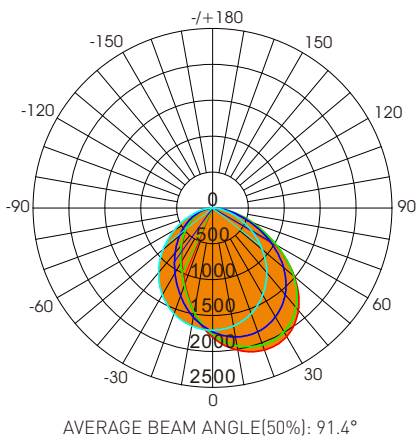

Test Number: ZE-42-ITWRD
 Lumens: 4602.1 Lm
 Watts: 41.95 W
 LPW: 109.71 Lm/W
 CCT: 4000K

UNIT: cd
 - C0/180, 81.4°
 - C30/270, 85°
 - C60/240, 95.3°
 - C90/270, 103.8°

Zonal Flux Diagram

τ	C0	C45	C90	C135	C180
10	2010	1892	1670	1472	1483
20	2106	1945	1568	1184	1126
30	2066	1891	1398	927.9	861.6
40	1860	1716	1174	715.0	661.5
50	1489	1408	904.0	528.6	494.0
60	10086	996.3	622.2	361.1	345.2
70	553.6	571.0	356.6	210.1	208.9
80	213.5	226.9	137.6	82.39	92.18
90	14.38	17.50	1.568	1.378	4.851
100	5.281	2.620	0.6399	0.9592	0.9344
110	1.389	0.8569	1.168	1.720	1.700
120	1.055	1.211	1.816	2.574	2.615
130	1.424	1.613	2.405	3.370	3.507
140	1.853	2.077	2.993	3.994	4.244
150	2.385	2.631	3.488	4.418	4.753
160	3.118	3.275	3.898	4.626	5.061
170	4.023	3.919	4.192	4.626	5.093
180	4.706	4.381	4.215	4.300	4.720
DEG	LUMINOUS INTENSITY:cd				

Zonal Lumens

τ	φ total
0-10	163.5
10-20	625.8
20-30	1318
30-40	2145
40-50	2988
50-60	3717
60-70	4233
70-80	4509
80-90	4586
90-100	4590
100-110	4591
110-120	4593
120-130	4595
130-140	4597
140-150	4599
150-160	4061
160-170	4062
170-180	4062
	UNIT: lm

Luminance cd/(m2)

G(DEG)	C0/180	C90/270
85	14792	9050
80	17074	11003
75	19709	12753
70	22480	14479
65	25273	15947
60	28006	17283
55	30421	18643
50	32173	19532
45	33247	20509